



## IX Series Video Door Station Streaming to Pelco® DS ControlPoint

The IX Series video door stations can be viewed by the Pelco DS ControlPoint client using the ONVIF connection method. By default, IX Series video door stations have the second video stream turned on and set to stream using the H.264 protocol. When configuring, verify door station settings.


### Pelco DS ControlPoint Client Screen Setup

Open the DS Quick Setup Wizard and search for the cameras on the network. Identify the IX Series video door station by its IP address and follow the steps to add it to the Pelco system.

- 1 Select the Aiphone IX Series camera by its IP Address. Click the **Authentication** tab and enter the Username (aiphone) and Password (aiphone). If audio recording is required, click the Audio tab and check the Enable Audio Recording box. Click **Next** to continue.

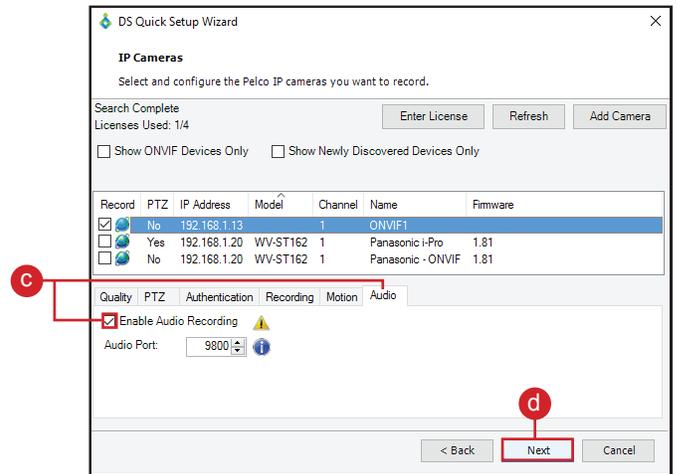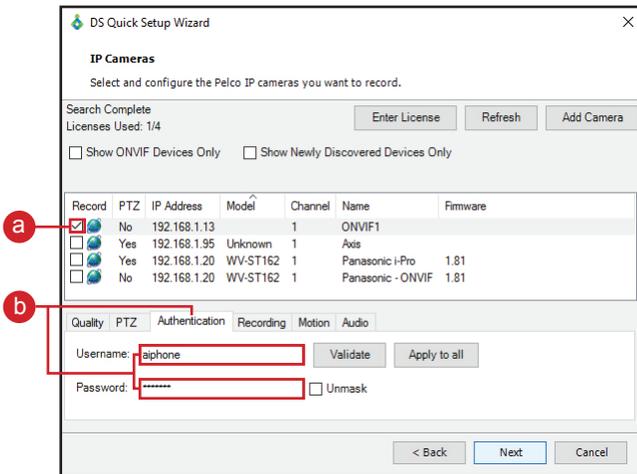


- 2 Review the configuration settings and click **Next** to register the camera.

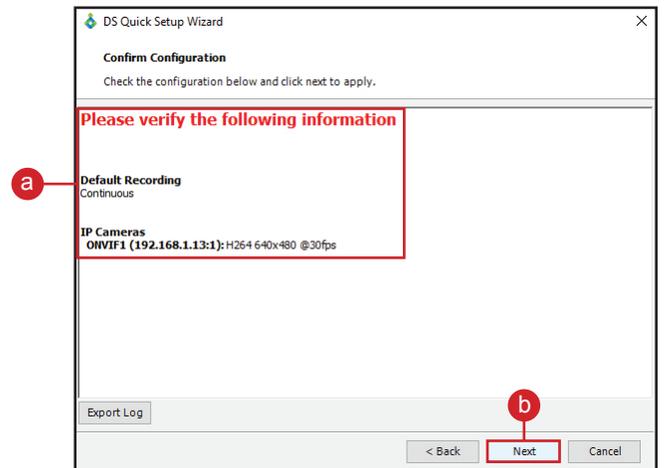


- 3 Login to DSAdmin.  
Username: admin  
Password: admin  
Click **OK**.



- 4 Select the IX Series door station from Cameras list. Click Edit IP Camera Settings button.

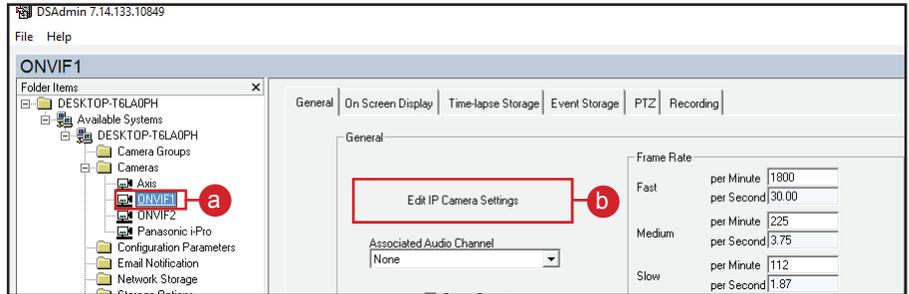

- 5 Set Port Number to 10080 and click OK.

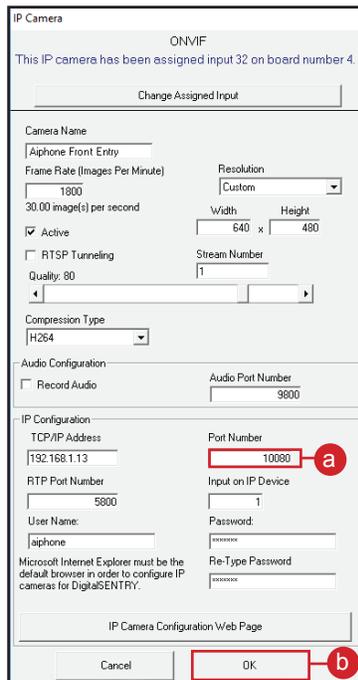

- 6 Open DS ControlPoint and drag the IX Series door station to a live window.

