
WIRING DIAGRAM


TD-12HB & 12 TD-1HB with 12 RY-AC

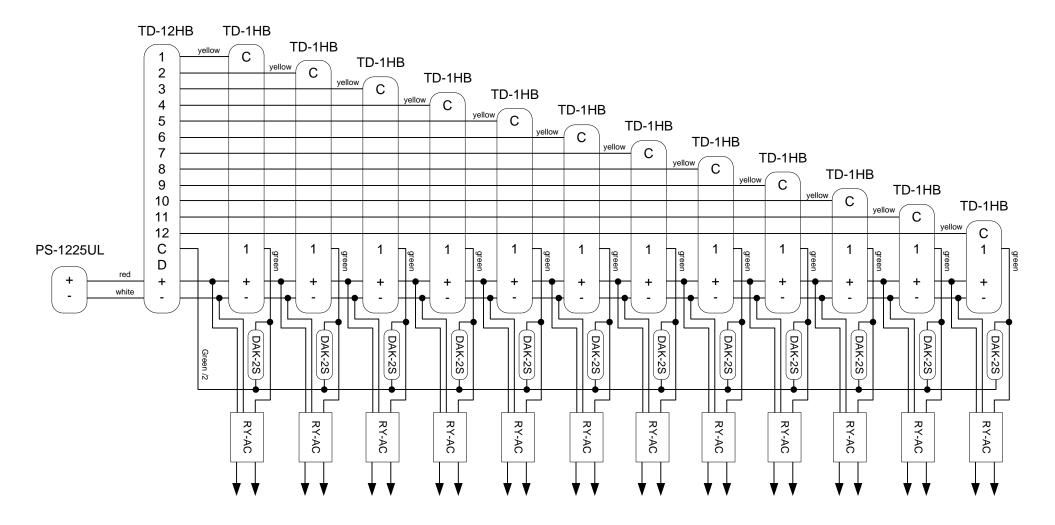

Notes: The bare wire side of the DAK-2S ties to the TD-12H/B's "C" terminal.

See RY-AC instructions for wiring.

(White wire to #1 on TD-1HB, Red wire to 12VDC+, Black wire to 12VDC-)

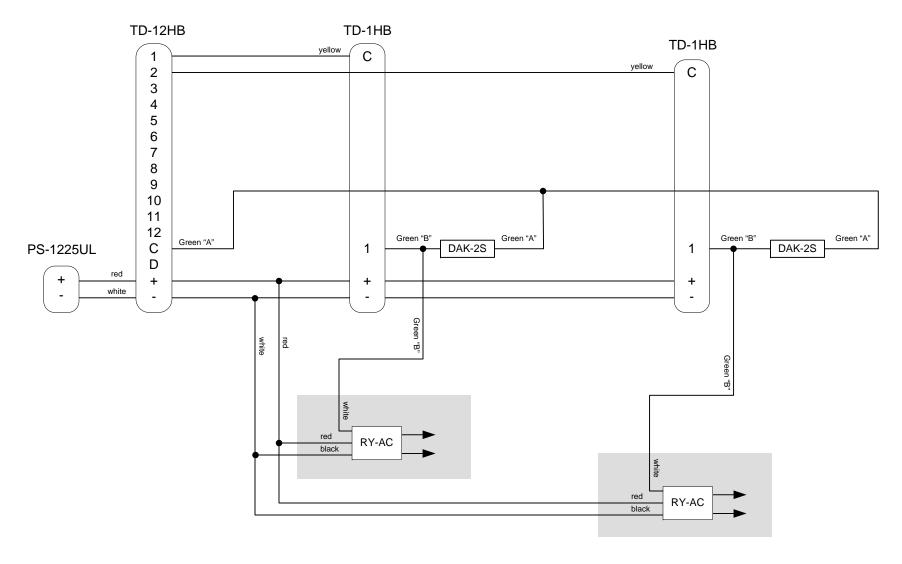

- Notes: The bare wire side of the DAK-2S ties to the TD-12H/B's "C" terminal.
- The #1 terminal of TD-1HB goes low (shorts to negative) when its call button is pushed.