



DESCRIPTION

The GT-TLI-IP is an IP adaptor for the GT Series that will allow mobile devices running the “AiphoneGT” app to be connected to answer a call from a visitor and open the door. The GT-TLI-IP adaptor comes with the instructions to connect up to 3 instances of the mobile app. The GT-TLI-IP can be included in a tenant space with another GT Series tenant station or it can be used stand-alone so the apps are the only option to answer and release the entrance door.

A working GT system with at least one entrance station is required when using the GT-TLI-IP VoIP interface adaptor. The GT-TLI-IP can be wall mounted using the mounting slots on the back of the unit.

The “AiphoneGT” App is free from Gega Electronique and is available on the Google Play™ Store and Apple App StoreSM.


FEATURES

- 12V DC Power Supply Included
- One Contact Input
- Three Relay outputs
- 24V DC 1A relay contact rating
- Supports up to three mobile apps
- App available for both iOS and Android
- Addressed to the entry panel like a GT Video Tenant Station

GT-TLI-IP

VoIP Interface for the GT series

FEATURE CALL-OUT

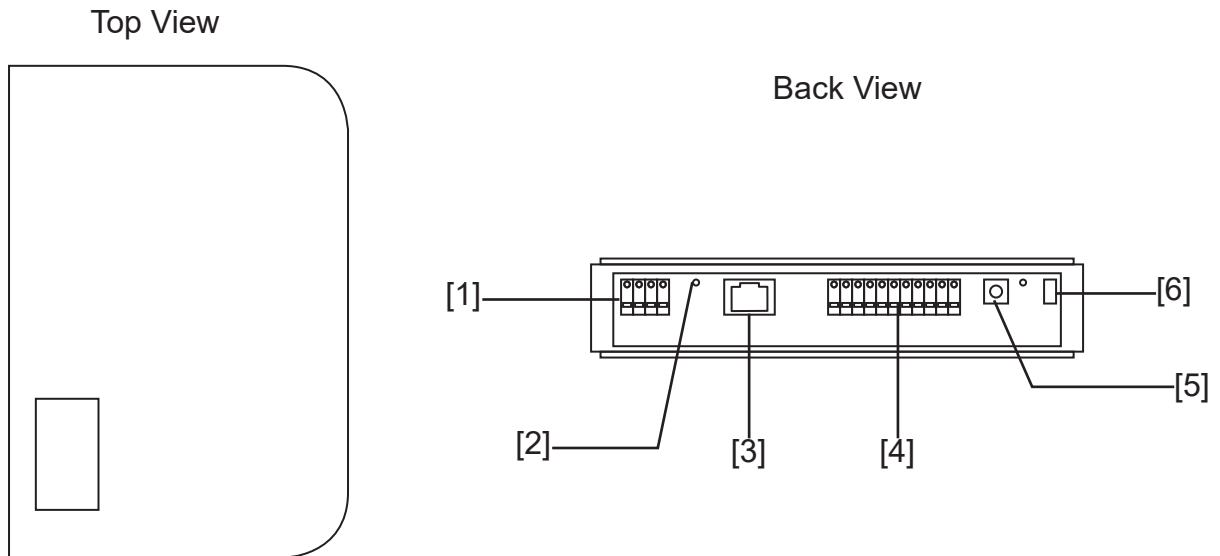

FEATURE CALL-OUT DEFINITIONS

[1] R1/R2 & B1/B2 Connections

[2] Programming button

[3] LAN Port

[4] Relay Outputs / Contact Input

[5] 12V DC Power Input

[6] Power Switch

SPECIFICATIONS

Power Source: 12V DC, 500mA
(Power Supply Provided)

Power Draw: Standby: 350mA
Active relay: 430mA

Relay Outputs: 12V DC, 2A; 24V DC, 1A

Connections: 1 Cat-5e/6 Ethernet
2 two conductor cables for GT
(audio-872002, video-871802)

Operating Temp: 32°~140°F (0°~40°C)

Dimensions: 10-1/4" x 7-1/16" x 2-1/16"

Weight: 1.35lbs