

Configuring Two-Way Video with IXG-DM7-HID* Entrance Stations

Introduction

IXG-DM7-HID* entrance stations can display two-way video while communicating with IX-MV7-* or IXG-MK stations with built-in cameras. This guide covers the software and firmware requirements for two-way video, as well as how to enable it in IXG Support Tool.

Resources

IXG Support Tool must be updated to version 5.0.1.0 or higher, and the firmware on the stations needs to be updated to the versions listed below.

IX-MV7-*: Version 7.20 or better

IXG-MK and IXG-DM7-HID*: Version 3.0 or better

Guides and downloads:


How to Update Station Firmware: <https://www.aiphone.com/kb/ixg-series/application-notes-ixg-series/updating-station-firmware>

IXG Support Tool: <https://www.aiphone.com/IXG-SupportTool>


IXG Firmware Updates: <https://www.aiphone.com/kbtopic/firmware>

Enabling Two-Way Video

In IXG Support Tool, change the **View(V)** to Advanced.

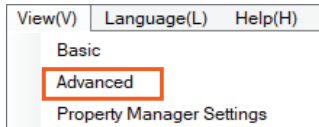

Navigate to **Entrance Station Settings**, Display. Scroll right to Display Video, and select **Display video from communicating station** for each entrance station that will display video. Click **Save**, and upload settings to all stations.

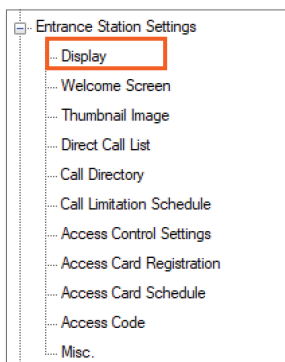

Entrance Station Settings			Entrance Station Settings		
Display			Display		
Building Nu	Unit Number	Station Name	Hearing aid Icon	Display Video	Language Icon
01	005	Entrance Station1	Disable	Display video from t	Enable
			Disable Display video from built-in camera Display video from communicating station		