

**Microprocessor Systems**


**RAX AND RCX SYSTEM DOOR STATION**

**RX-JA**

**FEATURES/FUNCTIONS:**

- \* Hands free communication between the door station and any master station.
- \* Activates standard doorbell or chime system.
- \* Quick 2 digit (w/RAX, RCX-48) or 3 digit (w/RCX-88/128) dialing to access door station from any master station.
- \* Flush mounts in a standard 2-gang box.
- \* Simple wiring: 2 twisted pairs home run to the CEU for communication, and 2 conductors to doorbell or chime device, powered remotely.

**SYSTEM LAYOUT EXAMPLE:**

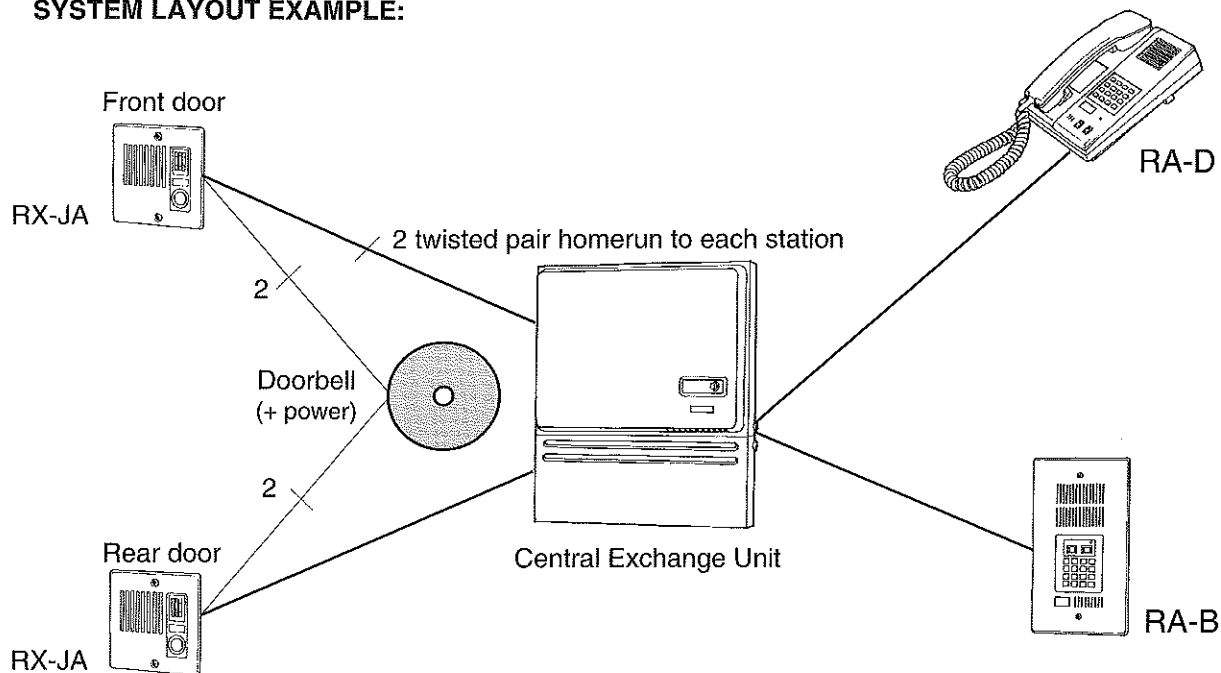

**SPECIFICATIONS:**

Power Source:	DC 24V supplied by Central Exchange Unit.
Current Consumption:	DC 10mA maximum.
Communication:	Loudspeaking voice-actuated.
Wiring Distance:	<b>RAX</b> - 2000' w/22AWG; <b>RCX</b> - 6500' w/22AWG.
Wiring:	2 Twisted pairs homerun to the Central Exchange Unit. Use Aiphone #832204. 2 Conductors (#812202) to doorbell system (not supplied by Aiphone).
Dimensions:	4-1/2"H x 4-9/16"W x 1-9/16"D

*See the RAX and RCX brochures and installation manuals for complete system information.*

**For more information on these and other Special Order Products, please call the Technical Support department.**

Aiphone Corporation  
1700 130th Ave. N.E.  
Bellevue, WA 98005  
(206) 455-0510  
FAX: (206) 455-0071

**Communication systems for business, home and industry.**

**TOLL FREE TECHNICAL DEPARTMENT**  
**FAX LINE: (800) 832-3765**