

HANDSET INTERCOM AT-406B


Kit box contains;

DESCRIPTION	MODEL NO.	UNIT
Master station	AT-206B	1 unit
Sub station	AT-306B	1 unit


DESCRIPTION HANDSET INTERCOM KIT BOX	FIG. NAME KIT BOX CONTENTS	UNIT mm	DATE 11 July, 2005
MODEL NO. AT-406B	FIG.NO. 34492-1-5	PAGE 1/5	REVISION 1

AIPHONE

PRODUCT DRAWING

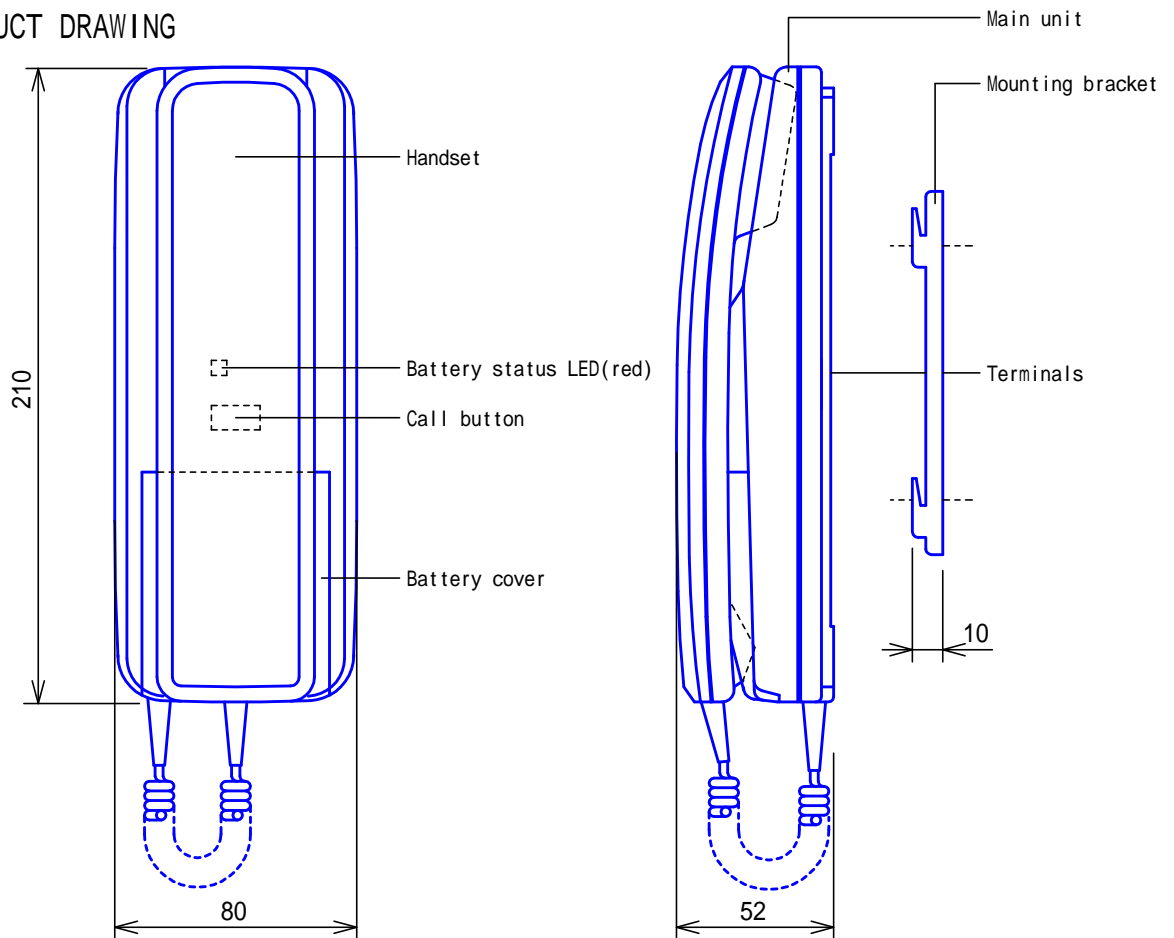


MOUNTING

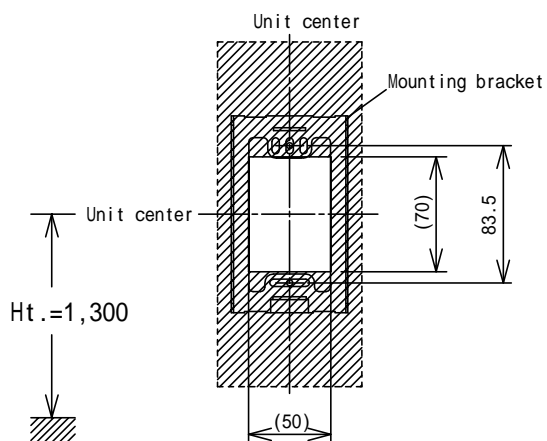

Cable inlet opening: Provided for single-gang mounting

DESCRIPTION MASTER STATION AT-206B	FIG. NAME PRODUCT DRAWING	UNIT mm	DATE 11 March, 2002
MODEL NO. AT-406B	FIG.NO. 34492-2-5	PAGE 2/5	REVISION 1
AIPHONE			

WIRING DIAGRAM

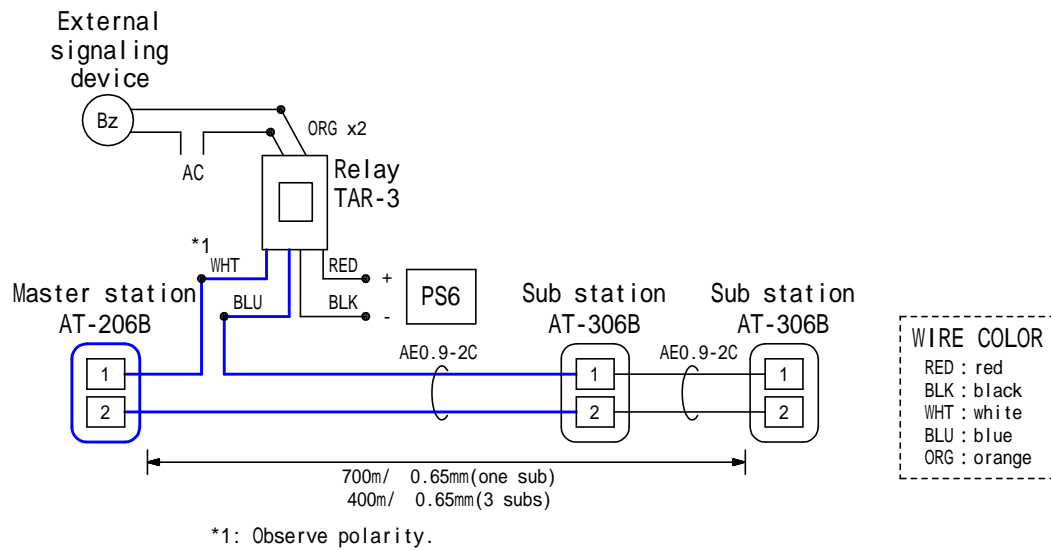

RESTRICTIONS

AT-406B is designed mainly for use in Limo, Boat (Cabin-to-Deck) & RV, etc.
 Call a sub station(s) in "All-Call" manner.
 To reach a particular sub station, differentiate way of sounding tone, such as call button pressing times, etc.
 Use AT-306B only for sub station of AT-206B Master station.
 AT-206B is not designed for desk-top use.


FUNCTIONS

Calling a sub station(s) by pressing CALL button. Enter communication upon (either) sub station lifting handset.
 External signaling device, such as buzzer, is activated as long as the AT-206 station is being signaled.


SPECIFICATIONS

Power source	DC6V. Use four batteries "AA" (SUM-3)		
Type of communication	Simultaneous with handset		
Battery life	Approx. 1 year (Estimated use : 10 times a day, w/5 sec. for calling and 20 sec. for communication)		
Capacity	Sub station (AT-306): Max. 3 units. Installs an External signaling device via Relay.		
Call tone	Electronic oscillating Beep tone(volume invariable)		
Mounting	Wall-mount		
Electrical box	Single-gang box		
Housing	HIPS plastic		
Weight	Approx. 300g (Batteries not included)		
Unit color	Charcoal gray		
DESCRIPTION MASTER STATION AT-206B	FIG. NAME SPEC./WIRING/RESTRIC./FUNC.	UNIT mm	DATE 11 March, 2002
MODEL NO. AT-406B	FIG.NO. 34492-3-5	PAGE 3/5	REVISION 1 AIPHONE

PRODUCT DRAWING

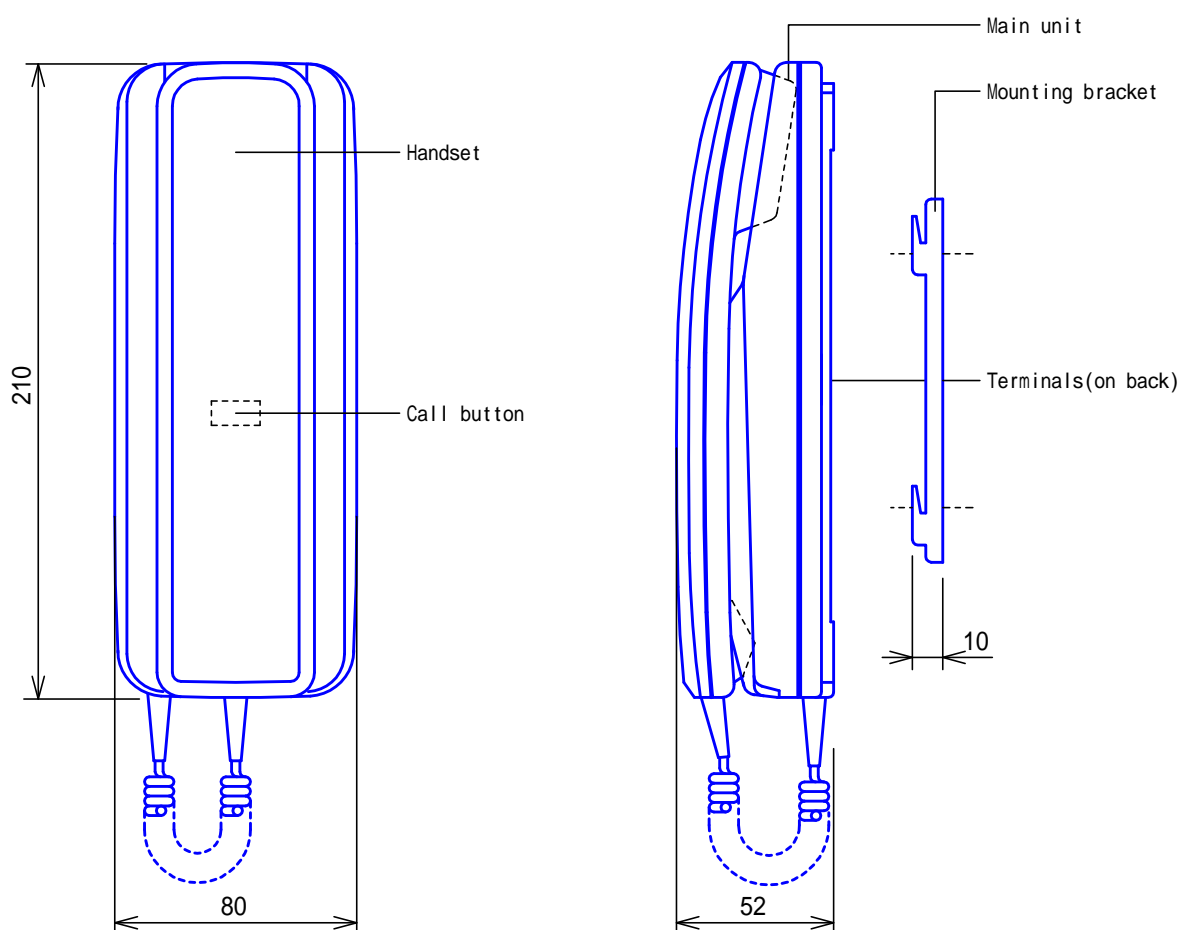


Mounting

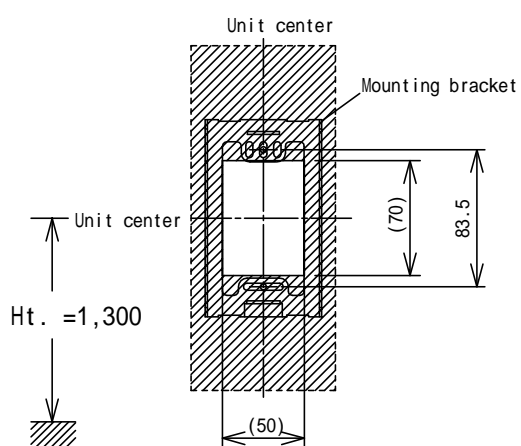

Cable inlet opening; Provided for single-gang mounting

DESCRIPTION SUB STATION AT-306B	FIG. NAME PRODUCT DRAWING		UNIT mm	DATE 11 March, 2002
MODEL NO. AT-406B	FIG.NO. 34492-4-5	PAGE 4/5	REVISION 1	AIPHONE

WIRING DIAGRAM

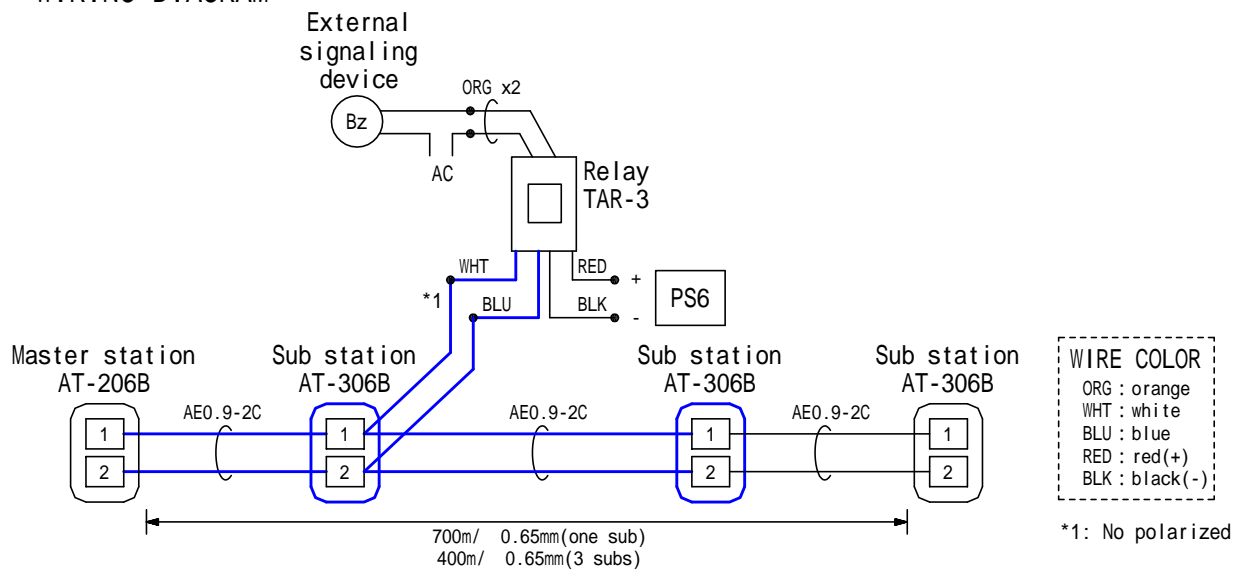

RESTRICTIONS

- AT-306B rings a call to the master station only.
- AT-306B can be used for AT-206B only.
- AT-306B is intended for wall-mounting only.

FUNCTIONS

- Call the master station by pressing CALL button. Enter communication upon Master station lifting handset.
- Receive a call from Master station by mono tone.
- Rings all Sub stations. Lift any handset.
- External signaling device, such as buzzer, is activated as long as the sub station is being signaled.

SPECIFICATIONS

Power source	Supplied from master station		
Type of communication	Simultaneous with handset		
Capacity	Sub station : max.3. External signaling device : max. 3		
Call tone	Electronic oscillating Beep tone(volume invariable)		
Mounting	Wall-mount		
Electrical box	Single-gang box		
Housing	HIPS plastic		
Weight	Approx.280g		
Unit color	Charcoal gray		
DESCRIPTION	FIG. NAME	UNIT	DATE
SUB STATION AT-306B	WIRING/RESTRIC./FUNC./SPEC.	mm	11 March, 2002
MODEL NO.	FIG.NO.	PAGE	REVISION
AT-406B	34492-5-5	5/5	1

AIPHONE