

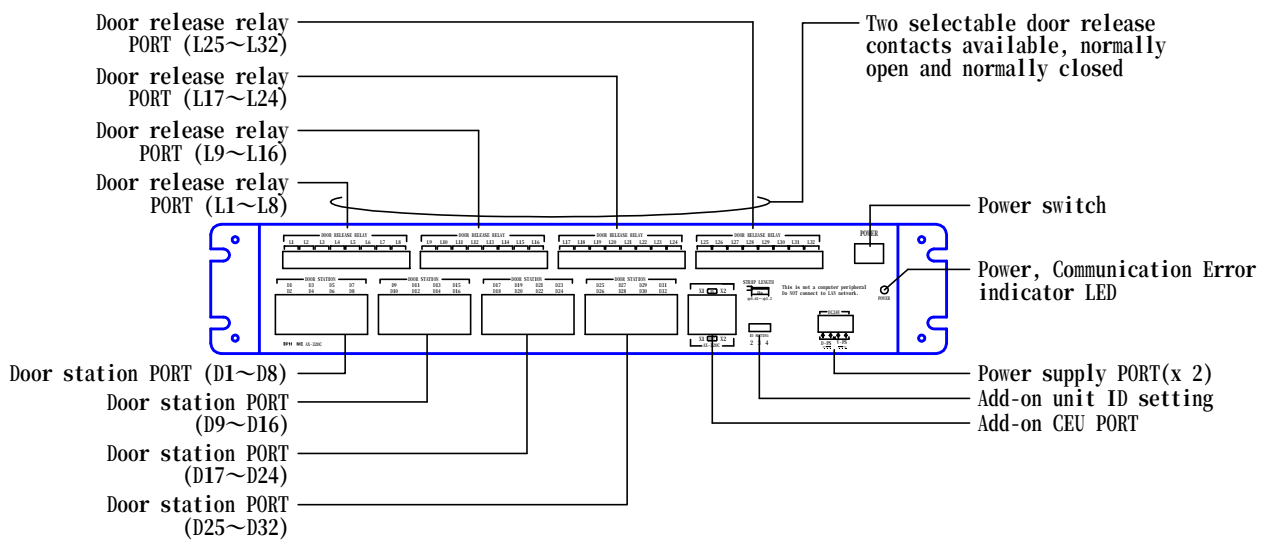


PRODUCT DRAWING

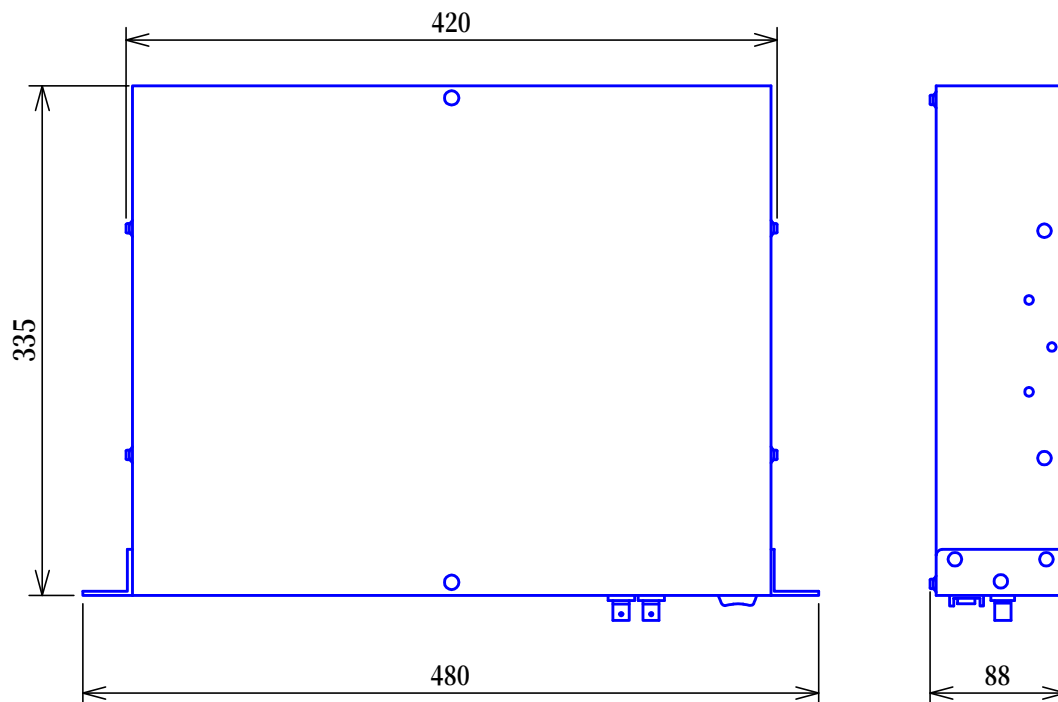


MOUNTING

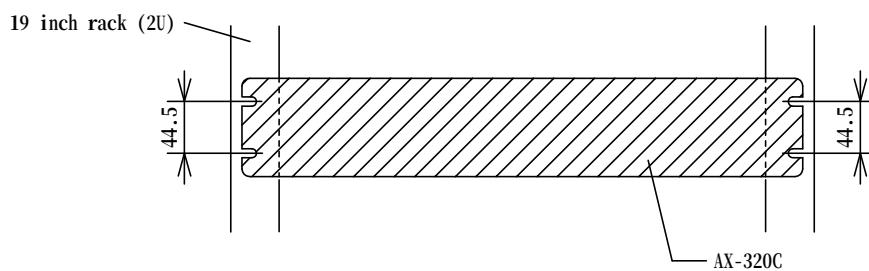

DESCRIPTION	FIG. NAME		UNIT	DATE
CENTRAL EXCHANGE UNIT (AX)	PRODUCT DRAWING		mm	12 April, 2006
MODEL NO.	FIG.NO.	PAGE	REVISION	AIPHONE
AX-320C	41610-1-3	1/3	1	

WIRING DIAGRAM

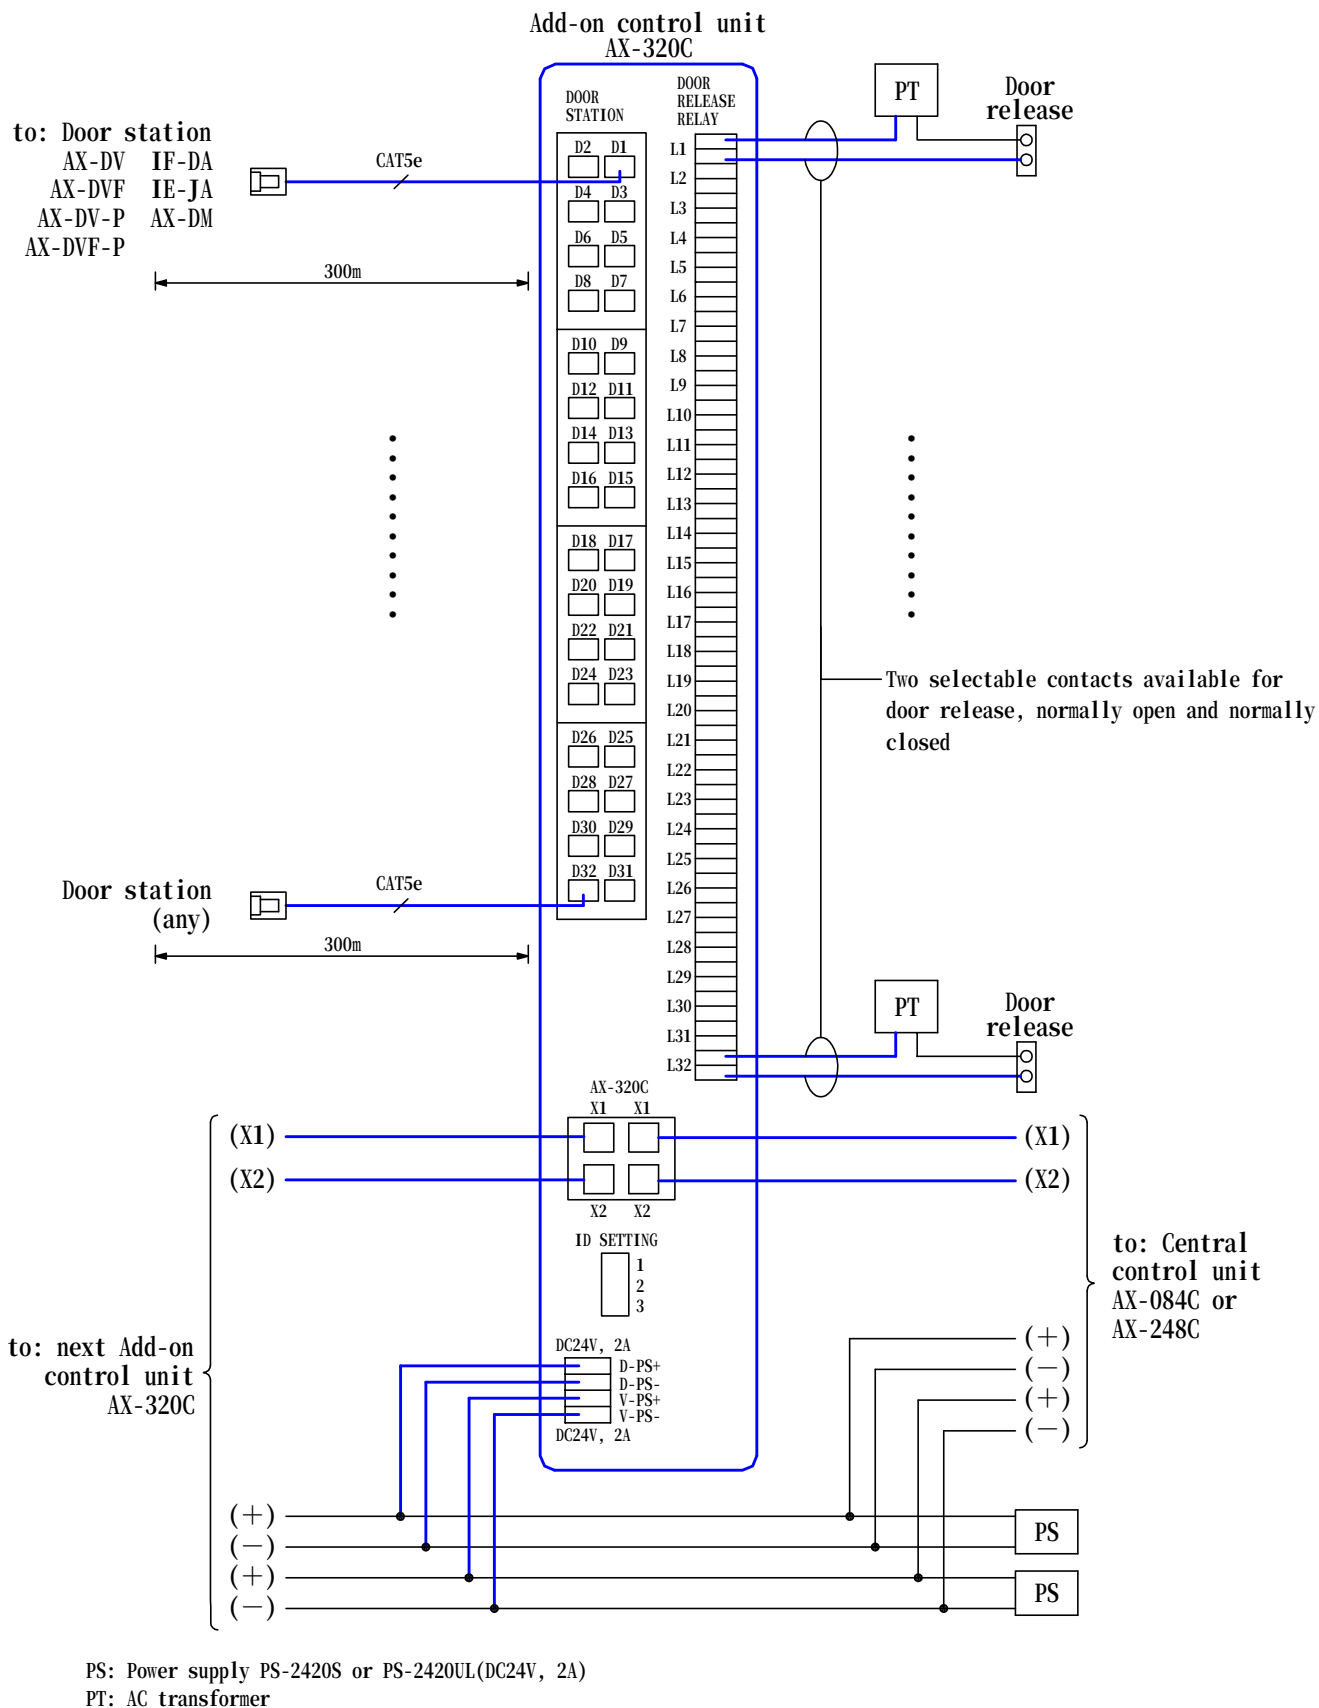

DESCRIPTION CENTRAL EXCHANGE UNIT (AX)	FIG. NAME WIRING DIAGRAM	UNIT mm	DATE 12 April, 2006
MODEL NO. AX-320C	FIG.NO. 41610-2-3	PAGE 2/3	REVISION 1
AIPHONE			

■ RESTRICTIONS

- AX-320C shall be mounted on the rack (19-inch, U2), together with Central control unit (AX-084C or AX-248C) and next add-on unit(s).
- AX-320C shall be located so that all the Master and Door stations be within max. 300m using CAT5e cable.

■ FUNCTIONS

- Provides open voice communication, hands-free auto-voice actuation or press-to-talk.
- Provides door station call-in transferred to CO line party (cell phone).
- Provides door release contacts(32) corresponding to Door stations(1~32).



Provides video output NTSC for external video device.

■ SPECIFICATIONS

Power source	DC 24V, 2A x 2			
Current consumption	Max. 400mA.			
Station capacity	Max. 3 Add-on units. Max. 32 Door stations per add-on unit.			
Mounting	Rack-mount (19-inch 2U rack) or wall mount.			
Ambient temperature	0~+40°C			
Weight	4,700g(approx.)			
Remarks	Used for: AX System			
DESCRIPTION CENTRAL EXCHANGE UNIT (AX)	FIG. NAME SPEC./RESTR./FCN.		UNIT mm	DATE 10 April, 2006
MODEL NO. AX-320C	FIG.NO. 41610-3-3	PAGE 3/3	REVISION 1	AIPHONE