



### DESCRIPTION

The GT-2H is an audio/video tenant sub-master station for the GT-2C master station. It is equipped with a talk, door release, and option button. Up to three of the GT-2H sub masters can be connected to a GT-2C master giving the tenant station-to-station communication ability. When a visitor calls, the tenant stations ring and video is present. The call is answered by the talk button. A handset (GT-HS) can be added to the unit if additional privacy is required. The unit features a 3.5" LCD monitor and a PTZ control button for the camera.


### FEATURES

- 3.5 LCD monitor
- Hands-free audio communication
- Optional handset for privacy (GT-HS)
- Door release button
- Optional button
- PTZ & brightness control
- Call tone volume control
- Communication volume control
- Maximum of three stations can be connected to a GT-2C master
- Internal communication between the GT-2C master and all three GT-2H

GT-2H

Sub-master Monitor Station

FEATURE CALL-OUT:

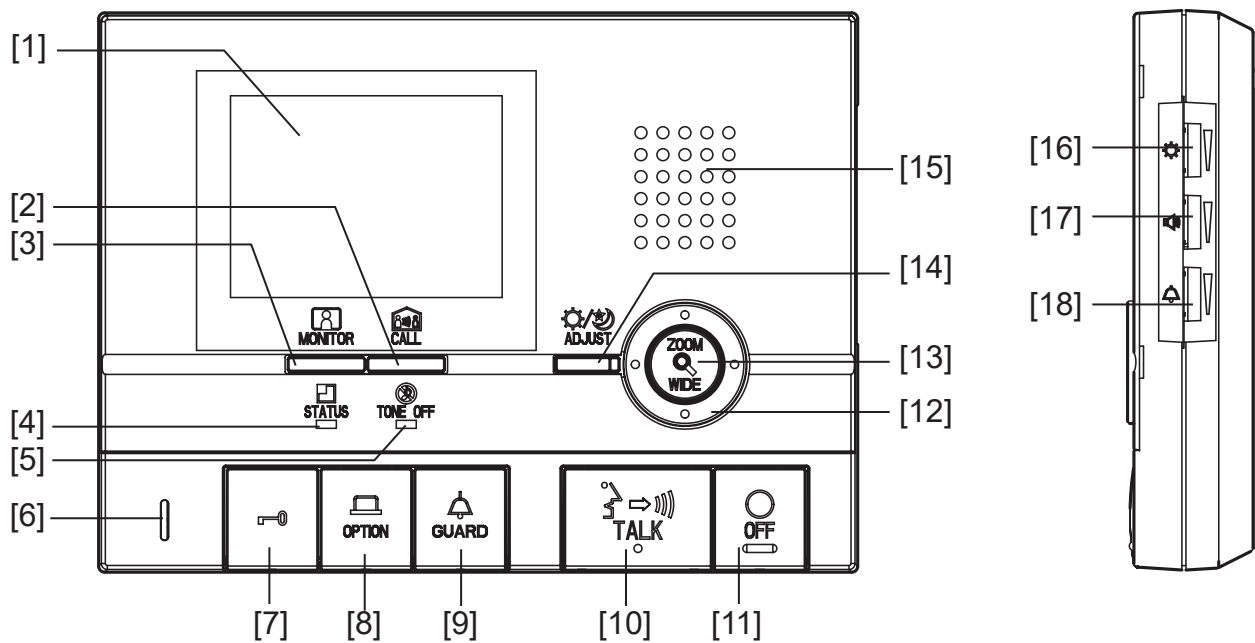

FEATURE CALL-OUT DEFINITIONS

- [1] Color LCD video monitor
- [2] CALL button
- [3] MONITOR button
- [4] Status LED (orange)
- [5] Tone Off LED (orange)
- [6] Microphone
- [7] Door Release button
- [8] Option button
- [9] Security Guard Call / Light button
- [10] Talk button w/ Transmit LED
- [11] Off button
- [12] PAN/TILT control button
- [13] ZOOM/WIDE button
- [14] Adjust button
- [15] Speaker
- [16] Screen brightness control (0~10)
- [17] Receive volume control (0~10)
- [18] Call tone volume control (0~10)

SPECIFICATIONS

Power Source:	24V DC, PS-2420UL
Current consumption:	Max 110mA
Communication:	Hands-free or Press-to-talk
Monitor:	3.5" LCD
Mounting:	Wall mount
Temperature:	32-104°F (0-40°C)
Dimensions:	5-1/2" H x 7-1/2" W x 1-1/4" D
Weight:	Approx. 0.97 lbs (440g)