

#### DESCRIPTION:

The IX-DF-HID-I is an IP addressable video door station for the IX Series, with a built in HID® iCLASS card reader.


The video door station will connect via CAT-5e/CAT-6 wire to a local area network (LAN). Maximum wire distance from the door station to the LAN is 330' (standard network wire distance rules apply).

Wiring and power for the card reader are separate from the intercom wiring. The card reader is to be connected to a host controller of any type that is compatible with the HID® iCLASS card reader.

Flush mount with the supplied back box or surface mount with the SBX-ISDVF.

#### FEATURES:

- IP Video door station for IX Series
- Stainless steel faceplate
- Visual call indication lights
- HID® iCLASS card reader built in
- Tamper resistant screws
- ONVIF Profile S compliant

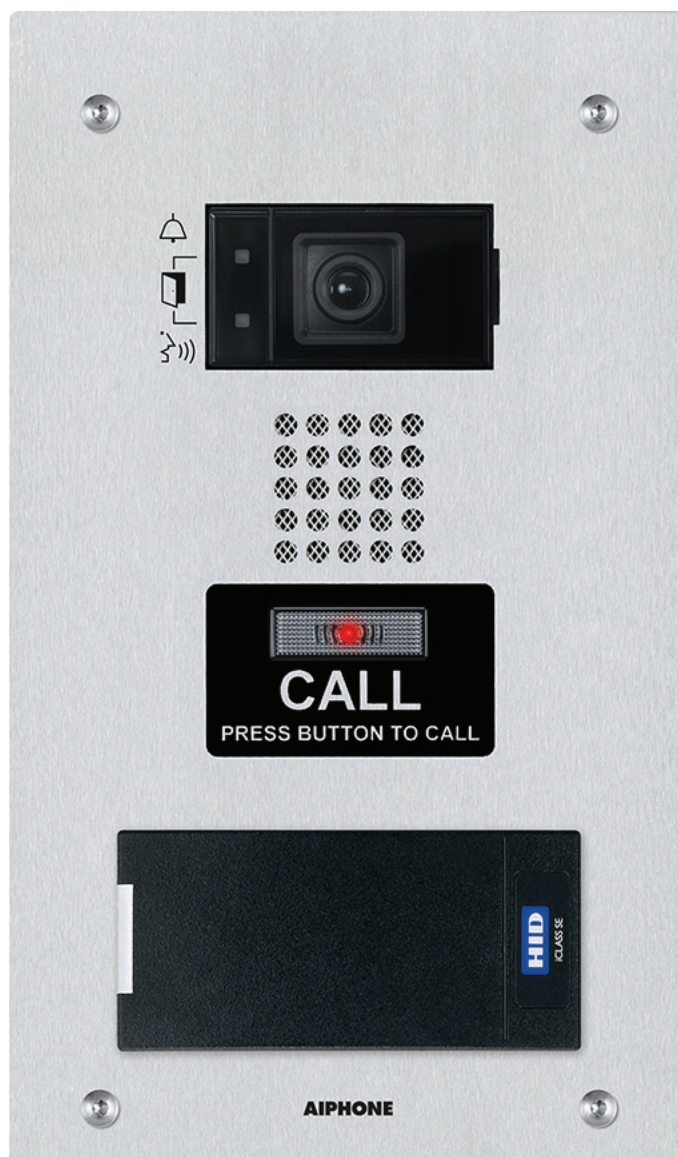

# IX-DF-HID-I

IP Addressable Flush Mount Video Door Station with HID® iCLASS Reader

## FEATURE CALL-OUT DEFINITIONS:

- [1] Camera
- [2] Microphone
- [3] Status LED's
- [4] Speaker
- [5] Call button
- [6] White LED for night viewing
- [7] HID® iCLASS, R10 reader

## SPECIFICATIONS:

|                    |                                     |
|--------------------|-------------------------------------|
| Power Source:      | 802.3af PoE compliant               |
| Communication:     | Open voice hands-free               |
| Camera:            | 1/4" color CMOS                     |
| Min. illumination: | 5 Lux                               |
| Wiring:            | CAT-5e or CAT-6                     |
| Door release:      | 24V AC/DC, 500mA<br>(N/O, COM, N/C) |
| Operating Temp:    | 14° - 140°F (-10° - 60°C)           |
| Dimensions:        | 10-7/16"H x 5-7/8"W x 2"D           |

## FEATURE CALL-OUTS:

