

IX-DVF-P


IP Video Door Station

The IX-DVF-P is a flush-mount weather-resistant IP video door station with a built-in HID® proximity reader. It connects to the network using Cat-5e/6 cable. The station is also SIP compliant.

Equipped with a 1.23 megapixel fixed color camera, its angle can be vertically adjusted using a lever on the back of the station. Video can be streamed using ONVIF® Profile S or RTSP. Audio and video can be stored on a microSD™ card.

It can be programmed to call up to 20 stations and one of three different call levels can be selected. The station has a 600Ω output that can be used for paging or communication. Two contact outputs can be programmed to activate when door release is triggered or based on a specific status. Six inputs can be used to trigger an outgoing call or answer a call/page.

There are audible and visual indicators for calling, communication, and door release. Sound files can be uploaded for custom messages to be played during door release, call placed, communication start, error message, and more.

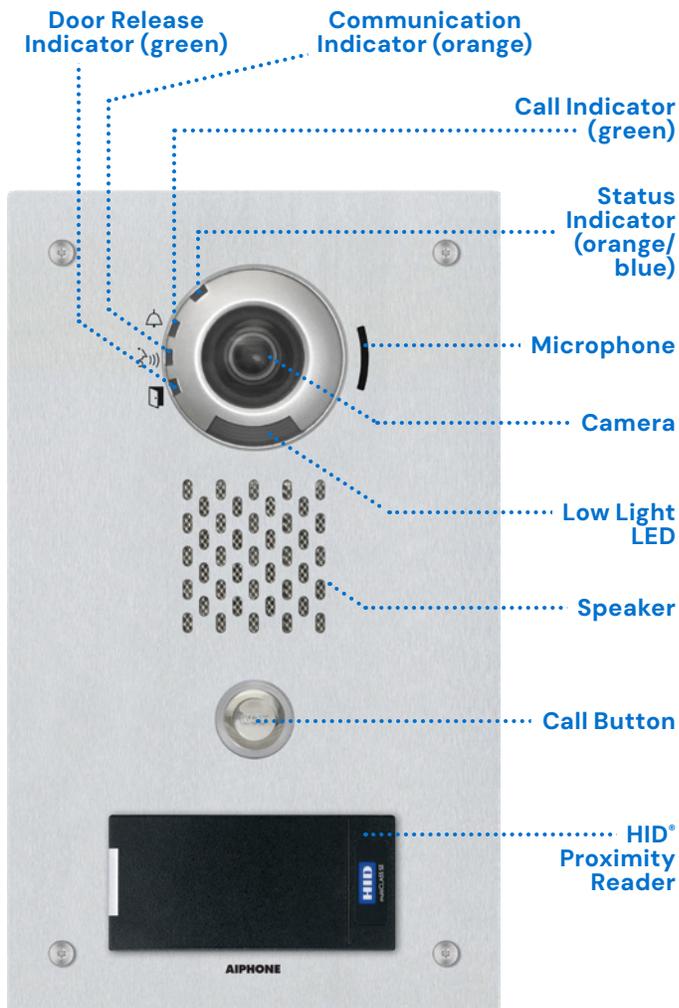

- **HID® multiCLASS SE® RP10 card reader**
- **SIP compliant**
- **1.23 megapixel fixed video camera**
- **White LED for low light illumination**
- **ONVIF® Profile S compliant**
- **Camera vertical adjustment +15°, 0°, or -8° (manual)**
- **Slot for microSD™ card**
- **Weather and vandal resistant**
- **Two contact outputs**
- **Six trigger inputs**
- **Stainless steel**
- **PoE (802.3af)**
- **RJ45 in/out with PoE passthrough (802.3at Type 2 PoE+)**

- Power Source** PoE (IEEE 802.3af class 0) or 24V DC (PS-242OUL)
- Power Draw** 5.28W
- Camera** 1/3" CMOS 1.23 megapixel
- Min Illumination** 5 lux
- Audio Codec** G.711 (μ-law, A law), G.722
- Protocols** IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS
- Port Security** IEEE 802.1X
- UL Listed** UL 62368-1 cUL 62368-1
- Operating Temp** -31°~140°F (-35°~60°C)
- Protection** IP65, IK08
- Dimensions** 11-11/16" H x 7" W