

IX-DVM


IP Video Door Station

The IX-DVM mullion-mount IP video door station is weather and vandal resistant. It has a built-in touchless call sensor, which incorporates a Class 1 laser. The station connects to a network using Cat-5e/6 cable and is SIP compliant.

Equipped with a 720p HD wide dynamic range fixed color camera, video can be streamed to third-party devices using ONVIF® Profile S or RTSP. Video can also be stored on a microSD™ card.

The IX-DVM can be programmed to call up to 20 stations with three different call level selections. There is one contact output that can be used for door release, and one input that can be used to trigger an outgoing call or answer a call/page.

There are audible and visual indicators for calling, communication, and door release. Sound files can be uploaded for custom messages to be played during door release, call placed, communication start, error message, and more.

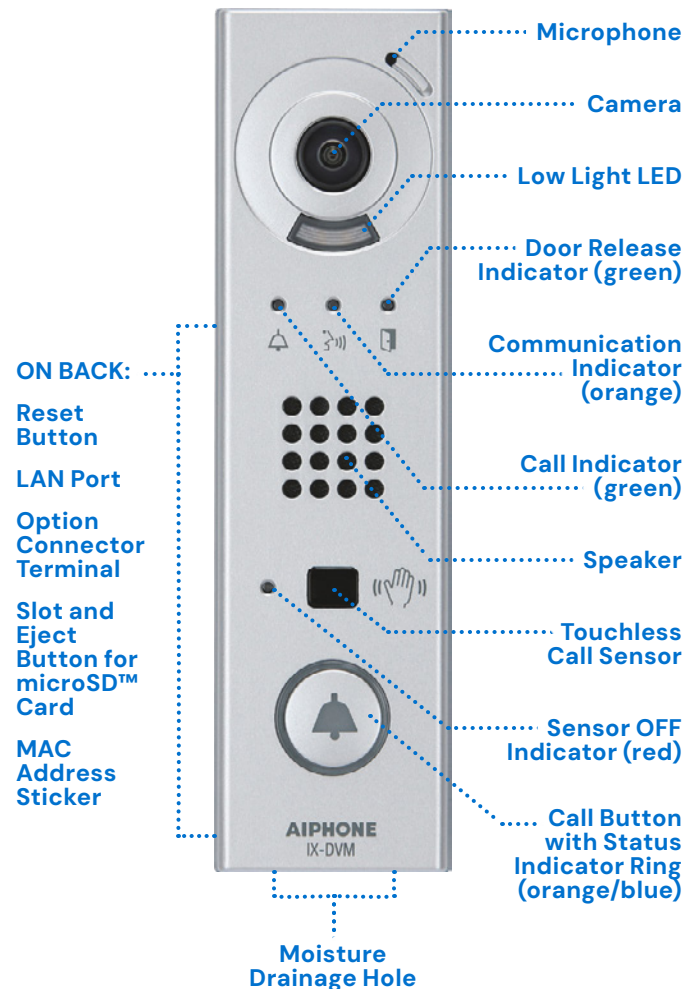

- **Trade Agreements Act (TAA) compliant**
- **Manufactured in Japan**
- **Small form factor for mullion mounting**
- **Touchless call sensor**
- **SIP compliant**
- **720p HD, wide dynamic range camera**
- **White LED for low light illumination**
- **ONVIF® Profile S compliant**
- **Slot for microSD™ card**
- **One contact output**
- **One trigger input**
- **PoE (802.3af)**

Power Source	PoE (IEEE 802.3af class 0)
Power Draw	4.6W max
Camera	720p HD, wide dynamic range, approx. 170° horizontal angle
Class 1 Laser	This product incorporates a Class 1 laser (transmissions conform with IEC 60825-1:2014)
Relay Output	Form C dry contact (N/O or N/C)
Contact Rating	24V AC, 1A (resistive load) 24V DC, 1A (resistive load)
Audio Codec	G.711 (μ-law, A law), G.722
Video Codec	H.264/AVC, motion JPEG
Protocols	IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS
Port Security	IEEE 802.1X
UL Listed	UL 62368-1 cUL 62368-1
Operating Temp	-40°~140°F (-40°~60°C)
Protection	IP54, IK07
Dimensions	1-7/8" W x 1-5/16" L x 6-7/8" H