

## IX-NVP


### IP Audio Door/Sub Station

The IX-NVP is a flush-mount weather-resistant IP audio door/sub station that connects to a network using Cat-5e/6 cable.

The station is SIP compliant and can be used with or without other IX|IXG Series stations. It can be programmed to call up to 20 stations; one of three different call levels can be selected.

There are audible and visual indicators for calling, communication, and door release. Sound files can be uploaded for custom messages to be played during door release, call placed, communication start, error message, and more.

Constructed of 12 gauge carbon steel with a white powder-coated finish, the IX-NVP can be flush mounted horizontally into a 3-gang back box (Raco model 692 or equivalent) or surface mounted using the SBX-NVP/A.

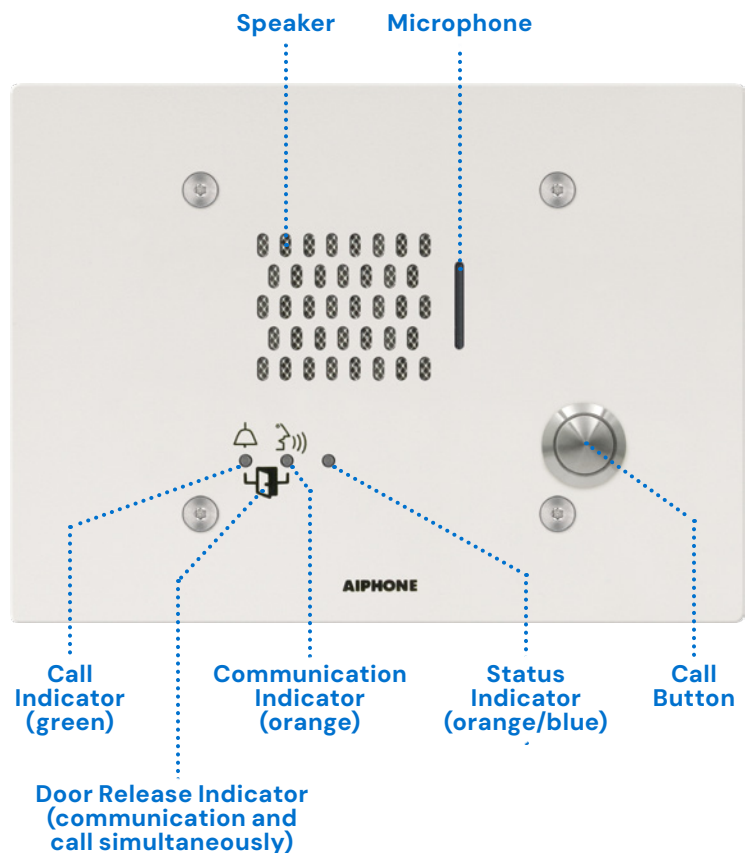

- **SIP compliant**
- **Weather and vandal resistant**
- **For indoor or outdoor use**
- **Normally open dry contact output (24V AC/DC, 500mA)**
- **Contact input for call-in**
- **Connects using CAT-5e/6 cable**
- **PoE (802.3af)**

**Power Source** 802.3af PoE compliant

**Power Draw** 3.36W

**Audio Codec** G.711 (μ-law, A law), G.722

**Protocols** IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS

**Operating Temp** -40° ~ 140°F (-40° ~ 60°C)

**Ingress Protection** IP65

**Dimensions** 5-1/2" H x 7-1/2" W