

## IX-NVP2


### IP Audio Door/Sub Station

The IX-NVP2 is a flush-mount weather-resistant IP audio door/sub station with two call buttons. It connects to a network using Cat-5e/6 cable.

The station is SIP compliant and can be used with or without other IX|IXG Series stations. It can be programmed to call up to 20 stations with the standard call button and up to 20 different stations with the red mushroom call button. Each button can be assigned a different call priority level.

There are audible and visual indicators for calling, communication, and door release. Sound files can be uploaded for custom messages to be played during door release, when a call is placed, and when communication starts.

Constructed of 12 gauge carbon steel with a white powder-coated finish, the IX-NVP2 can be flush mounted horizontally into a 3-gang back box (Raco model 692 or equivalent) or surface mounted using the SBX-NVP/A.

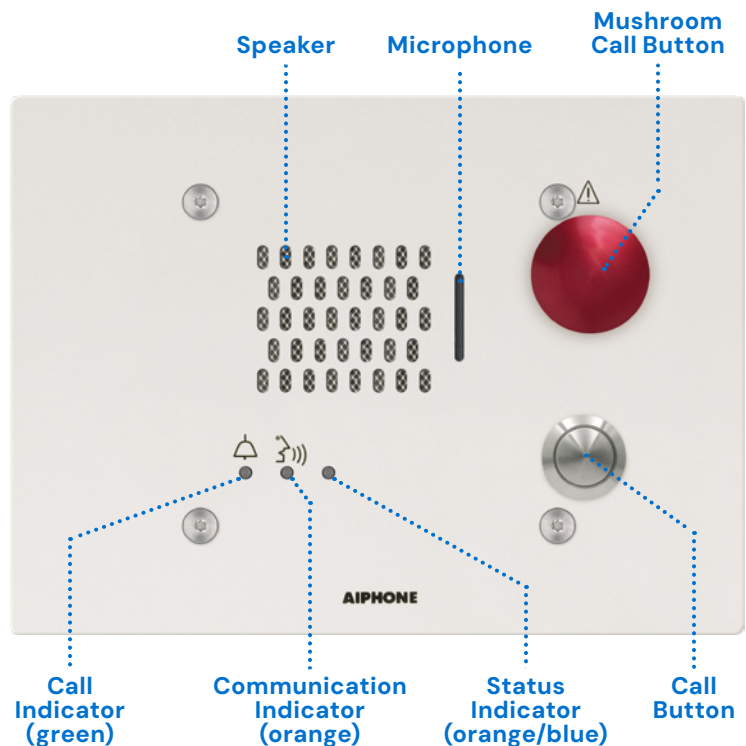

- **Red mushroom button for secondary call**
- **SIP compliant**
- **Weather and vandal resistant**
- **For indoor or outdoor use**
- **One contact output**
- **Connects using CAT-5e/6 cable**
- **PoE (802.3af)**

**Power Source** 802.3af PoE compliant

**Power Draw** 3.36W

**Audio Codec** G.711 (μ-law, A law), G.722

**Protocols** IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS

**Operating Temp** -40° ~ 140°F (-40° ~ 60°C)

**Ingress Protection** IP65

**Dimensions** 5-1/2" H x 7-1/2" W