


IX-NVP2

3-Gang Sub Station


-INSTRUCTIONS-

The IX-NVP2 is a vandal and weather resistant sub station designed for use with the IX Series IP intercom system. It is constructed of 12 gauge carbon steel with a white powder-coated finish. It has a standard call button and a red mushroom call button that wires to the option input. The mushroom call button is programmed independently of the standard call button. The IX-NVP2 will flush mount horizontally into a 3-gang masonry type box (Raco model 692 or equivalent) or surface mount using the SBX-NVP/A. Tamper proof screws and a tool for installation are included.

Note: The IX-NVP2 will be treated as an IX-SS-2G when programming the station. 

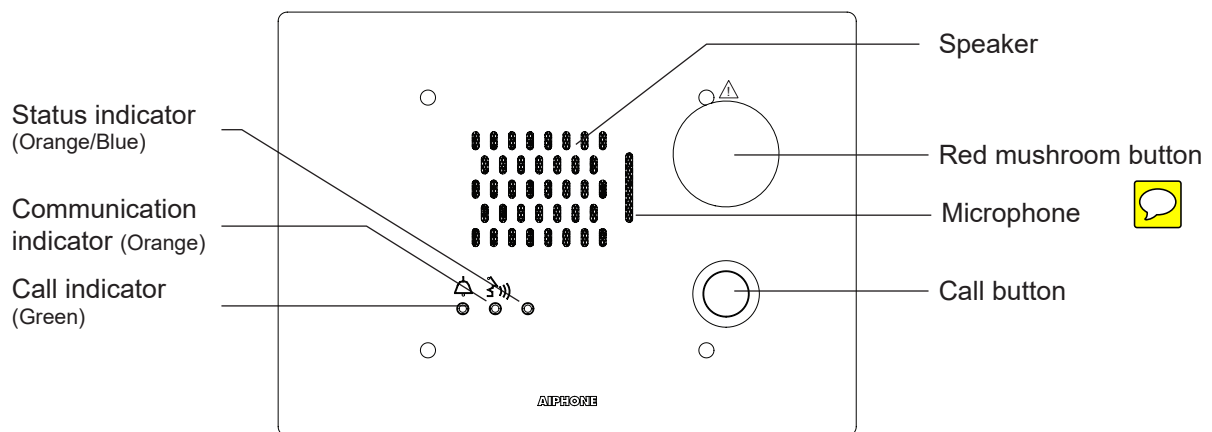

WIRING:

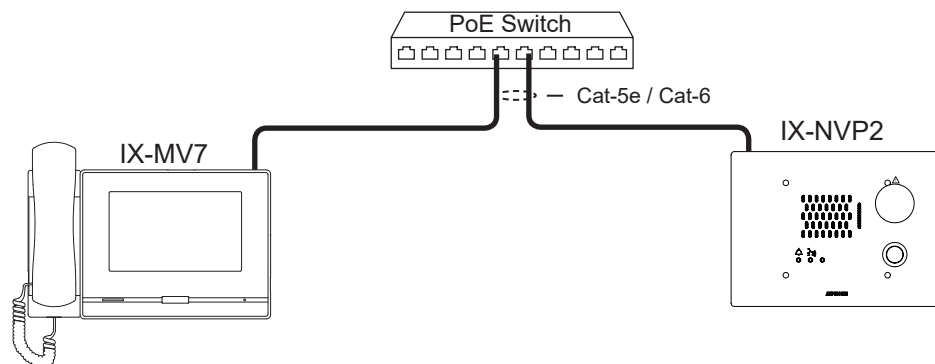

SPECIFICATIONS:

Power Source:	802.3af PoE compliant
Power Draw:	3.36 Watts
Audio Codec:	G.711 (μ -law, A law), G.722
Protocols:	IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS
Operating Temp:	-40° ~ 140°F (-40° ~ 60°C)
Dimensions:	5-1/2" H x 7-1/2" W x 2" D
Mounting:	Horizontal in a 3-gang masonry-type box. If mounted vertically, the unit will not be weather resistant. (Any damage caused due to vertical mounting will not be covered under warranty.)