


IX-SS-2G

IP Audio Door Station

The IX-SS-2G is a 2-gang flush-mount weather-resistant IP audio door station that connects to a network using Cat-5e/6 cable.

The station is SIP compliant and can be used with or without other IX|IXG Series stations. It can be programmed to call up to 20 stations; one of three different call levels can be selected.

There are audible and visual indicators for calling, communication, and door release. Sound files can be uploaded for custom messages to be played during door release, call placed, communication start, error message, and more.

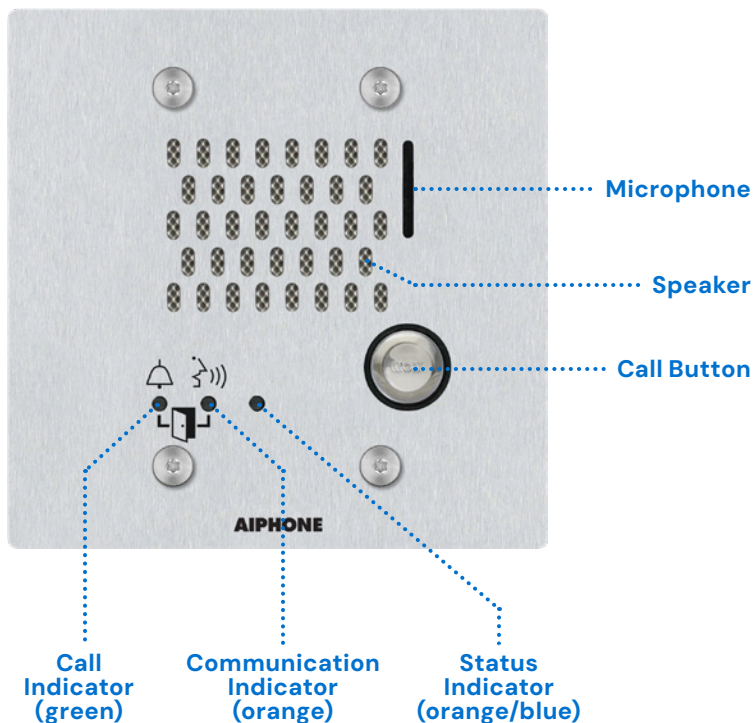

- SIP compliant
- Illuminated call button indicator
- Weather and vandal resistant (IP65, IK10)
- One contact output
- One trigger input
- Stainless steel
- PoE (802.3af)
- One PoE LAN port

Power Source PoE (IEEE 802.3af class 0)

Power Draw 3.36W

Audio Codec G.711 (μ-law, A law), G.722

Protocols IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS

Port Security IEEE 802.1X

UL Listed UL 62368-1 cUL 62368-1

Operating Temp -40° ~ 140°F (-40° ~ 60°C)

Ingress Protection IP65

Impact Protection IK10

Dimensions 4-3/4" H x 4-3/4" W