

#### DESCRIPTION:

The IX-SS-RA is an IP addressable stainless steel, flush mount audio door station with an emergency call button. Button features ADA compliant lettering and Braille signage. A call status indicator is included to meet ADA rescue assistance requirements.

The emergency button will trigger two programmable relay outputs for activation of external systems or devices and can be programmed to call up to 20 master stations.


The unit has a stainless steel faceplate and includes tamper resistant screws.

The IX-SS-RA is compatible with the IX Series. The emergency button can be assigned one of three priority call queuing levels. The station is 802.3af PoE compliant.

Flush mount with the supplied back box or surface mount with the SBX-ISDVFRA.

#### FEATURES:

- Audio communication of calling area
- ADA compliant lettering and Braille signage
- LED call status indicator
- Red mushroom button for emergency call
- Stainless steel faceplate with tamper resistant screws

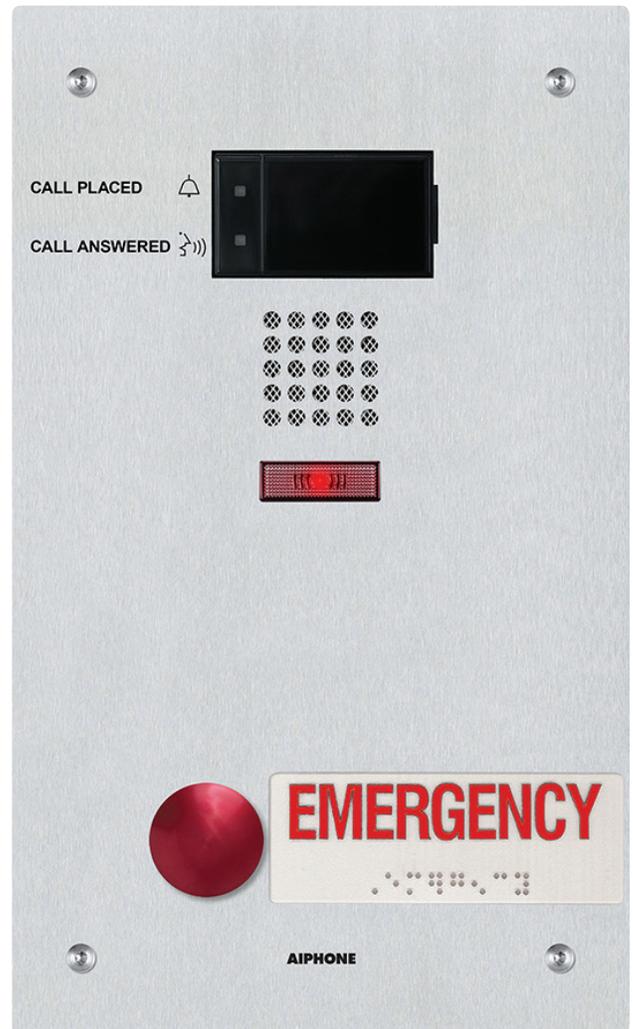

# IX-SS-RA

IP Addressable Audio Emergency Station for the IX Series

## FEATURE CALL-OUT DEFINITIONS:

- [1] Microphone
- [2] Call status indicators
- [3] Speaker
- [4] LED locator
- [5] Emergency button
- [6] Emergency signage with Braille

## SPECIFICATIONS:

- Power Source: 802.3af PoE compliant
- Communication: Open voice, hands-free
- Wiring: CAT-5e or CAT-6
- Wiring distance: 330'
- Door release: 24V AC/DC, 500mA (N/O, COM, N/C)
- Operating Temp: 14° - 140°F (-10° - 60°C)
- Ingress Protection: IP55
- Dimensions: 11-11/16"H x 7"W x 2"D

## FEATURE CALL-OUTS:

