



DESCRIPTION

The IXG-2C7-L is an IP video tenant station with a 7" LCD touchscreen for the IXG Series multi-tenant system. Each tenant can have up to 8 IXG-2C7/IXG-2C7-L's. The IXG-2C7-L station can answer calls from an entrance station, guard station, or individual door station. Once the call is answered, communication is hands-free (VOX).

A T-Coil hearing aid is able to pick up audio signals from the IXG-2C7-L. Touching the key button will activate the door release associated with the connected entrance station or door station. The IXG-2C7-L can selectively call other IXG-2C7-L's in the same tenant or collectively call associated mobile apps. The IXG-2C7-L can request an elevator to come to its floor. It will also retain a history of calls that it has received. The history capacity can be expanded by adding a microSD™ card.


FEATURES

- T-Coil hearing aid compatibility
- PoE compliant
- 7" LCD color touchscreen
- Hands-free audio communication
- microSD™ card slot for added memory
- Place calls to other stations within tenant
- Call concierge/guard
- Call elevator to floor
- Monitor door stations

IXG-2C7-L

IP Video Tenant Station

FEATURE CALL-OUT

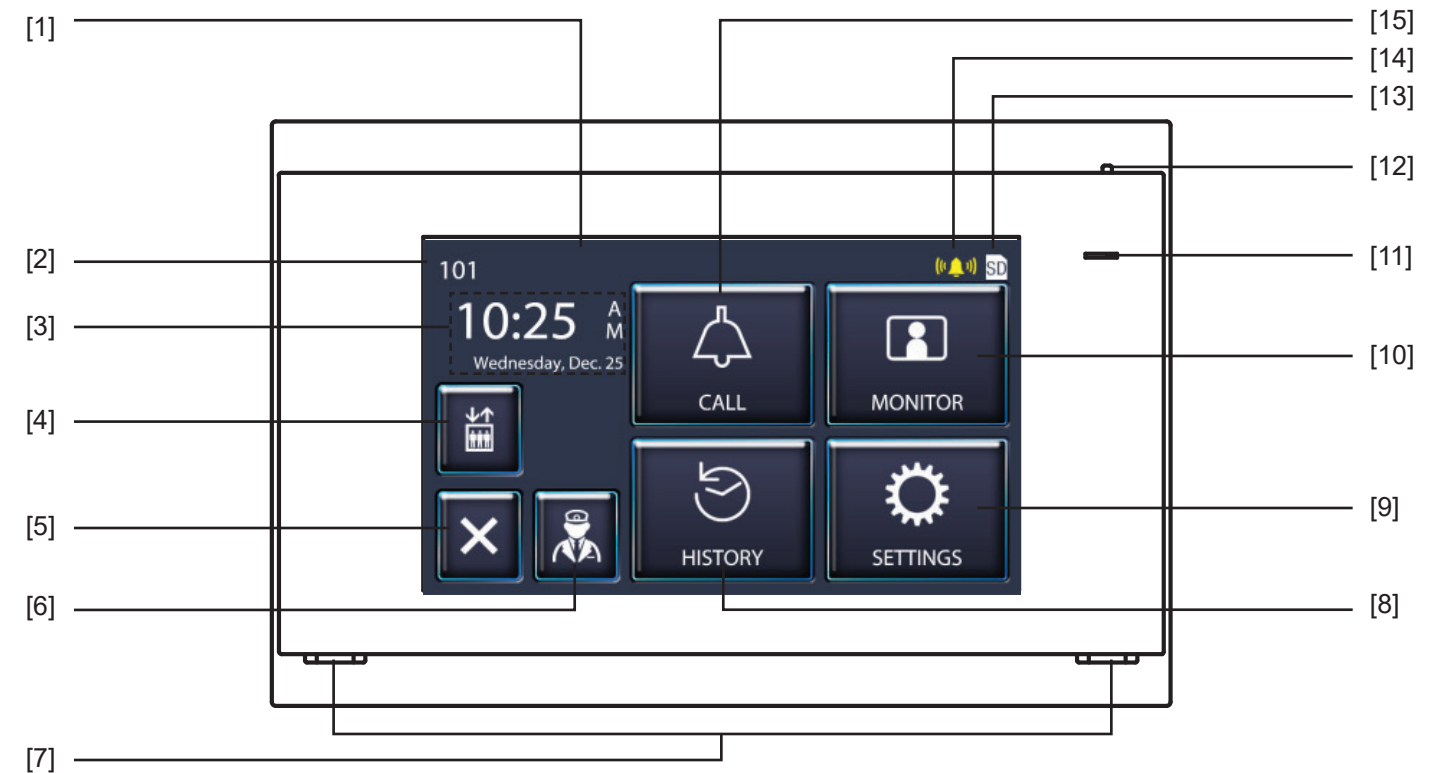

FEATURE CALL-OUT DEFINITIONS

- [1] LCD Touchscreen
- [2] Unit Number
- [3] Date and Time
- [4] Elevator Call Button
- [5] Off Button
- [6] Guard Call Button
- [7] Speaker
- [8] History Button
- [9] Settings Button
- [10] Monitor Button
- [11] Status Indicator (Blue)
- [12] Microphone
- [13] microSD™ Card Inserted Icon
- [14] Incoming Call Icon
- [15] Call Button

SPECIFICATIONS

Power Source:	PoE
Consumption:	1.9W standby, 6W max.
Screen:	7" LCD TFT touchscreen
Monitor resolution:	800 x 400
Communication:	Full-duplex
Audio Codec:	G.711(μ-law, A-law)
Video Codec:	H.264, MJPEG
Protocol:	IPv4/v6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP/RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS, TLS
Encryption:	TLS 1.0, 1.1, 1.2
Operating Temp:	32° ~ 104°F (0° ~ 40°C)
Dimensions:	5-13⁄16" H x 8-15⁄16" W x 1" D