


Comparing the IXGW-LC and IXGW-LC-RY20

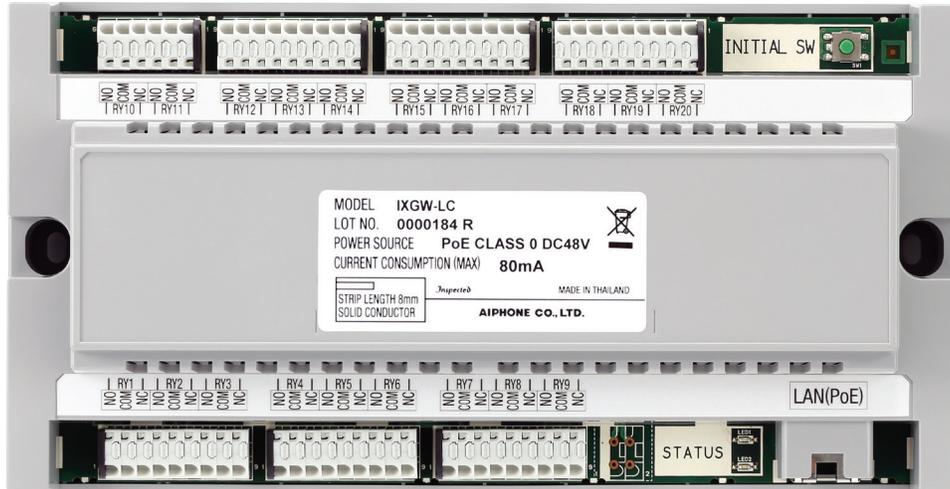

Key Information

The IXGW-LC-RY20 is a variant of the IXGW-LC Elevator Lift Control Adaptor. The main difference between them is the timing of the **Pick Up Floor** setting.

On the stock IXGW-LC, the programmed **Pick Up Floor** output activates as soon as the call is placed. This is meant to work with a third-party lift controller to send the elevator car down to the desired floor so that the visitor does not have to wait once they are granted entry.

On the IXGW-LC-RY20, the **Pick Up Floor** output activates when the tenant pushes the door unlock button. This allows the IXGW-LC-RY20 to act as a door release relay.

All other settings and functions are identical between the two types of stations.

Limitations

It is not possible to convert one of these stations into the other in the field. If both functions are needed, an IXG system can support multiple Elevator Lift Control Adaptors.

Both adaptors work with IXG-DM7-HID entrance panels, but are not compatible with IX Series door stations. Use the IXW-MA IP Relay Adaptor when working with IX Series door stations.