




The IXGW-GW is a gateway adaptor for the IXG Series IP multi-tenant system. Only 1 gateway adaptor is allowed per system. This adaptor allows the system to be programmed to call cloud-based mobile apps, giving users the ability to answer the calls from visitors remotely and release the door.

The IXG app is compatible with iOS® and Android® mobile devices. Up to 8 apps can be registered per tenant station.

- PoE (IEEE 802.3af class 0)
- DIN rail mountable
- Ten simultaneous paths
- Supports up to 9,999 IXG apps

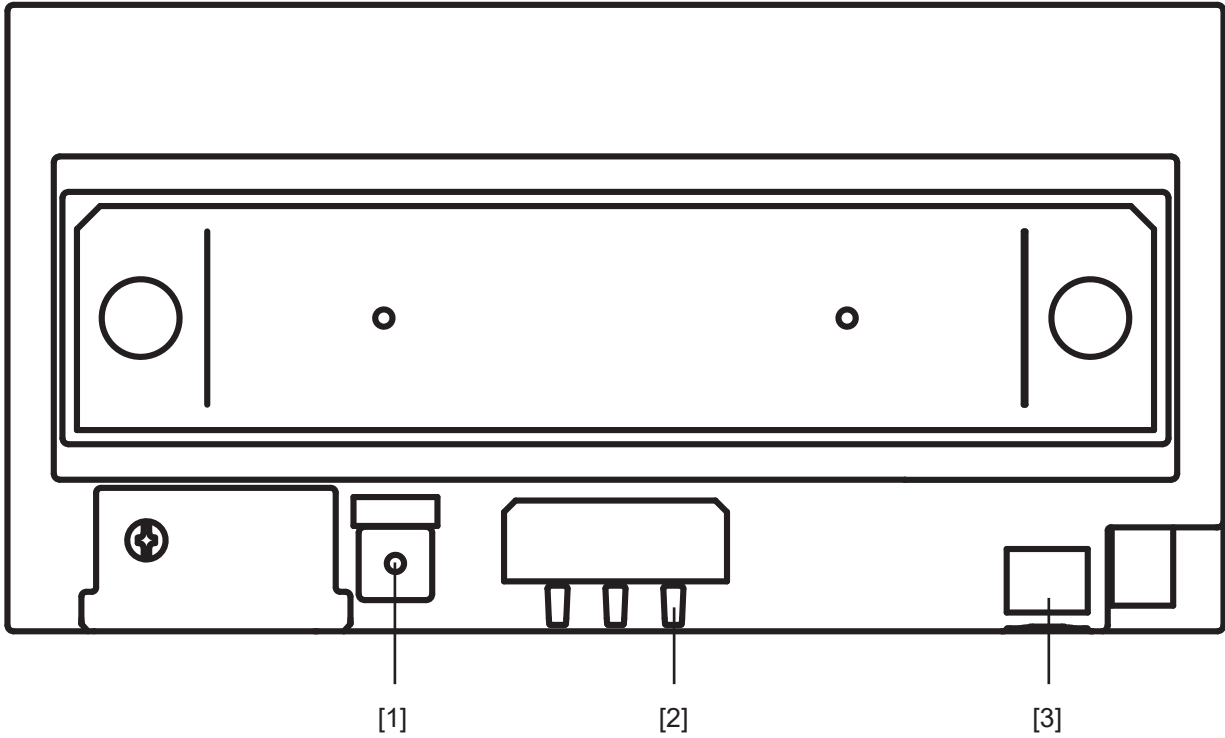

[1] Reset

[2] Status Indicator (orange/green)

[3] LAN Port (PoE)

PoE

Standby 2.1W, Max 2.9W

Ethernet
(10BASE-T, 100BASE-TX)

Unicast, Multicast

IPv4/v6, TCP, UDP, SIP,
HTTPS, RTP, RTCP, SRTP,
SRTCP, IGMP, MLD, SFTP,
DHCP, NTP, DNS, MQTT,
ICE, DTLS, SDP

8

TLS 1.0, 1.1, 1.2

14° ~ 122°F (-10° ~ 50°C)

4-1/4" H x 8-1/4" W x 2-3/8" D

UL 62368-1
cUL 62368-1