


## IXGW-LC

### Elevator Lift Control Adaptor

The IXGW-LC is a lift control adaptor with 20 Form C relays. It is designed to integrate with an elevator control system. Up to 16 adaptors can be included in each building.

Relays can be configured to trigger based on which unit is called or which tenant takes an action. These relays enable features like calling the elevator to the ground floor when a visitor places a call, granting access to particular floors once a visitor enters the elevator, and summoning the elevator to a specific floor.

The adaptor can be surface mounted directly to the wall through the mounting points on either side. It can also be mounted on a standard, 35mm x 170mm DIN rail, which is included with the station. Wire terminations connect directly to the inputs and outputs on the station.

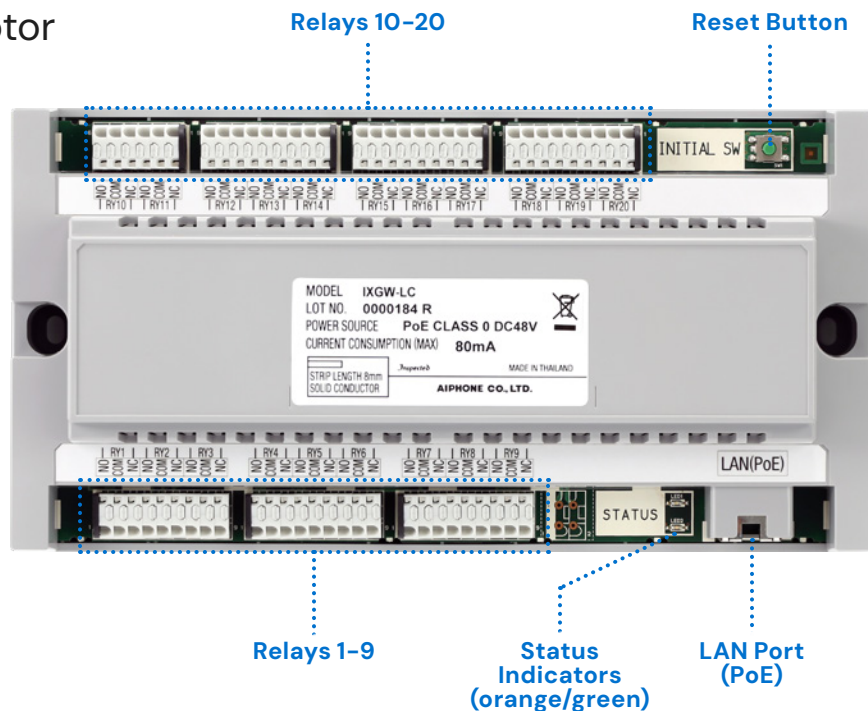

- **PoE (IEEE 802.3af class 0)**
- **20 Form C relays**
- **Relay rating (24V AC/DC 500mA)**
- **Up to 16 adaptors per building**
- **DIN rail or wall mountable**

**Power Source** PoE

**Power Draw** 2.1W standby, 4.4W max

**LAN** Ethernet (10BASE-T, 100BASE-TX)

**Packet Delivery** Unicast, Multicast

**Protocols** IPv4/v6, TCP, UDP, HTTP, HTTPS, IGMP, MLD, SFTP, DHCP, NTP, DNS, TLS

**Encryption** TLS 1.2

**UL Listed** UL 62368-1 cUL 62368-1

**Operating Temp** 14°~122°F (-10°~50°C)

**Dimensions** 5-13/16" H x 8-15/16" W x 1" D

**Din Rail Mount** 35mm W x 170mm L