



PRODUCT DRAWING

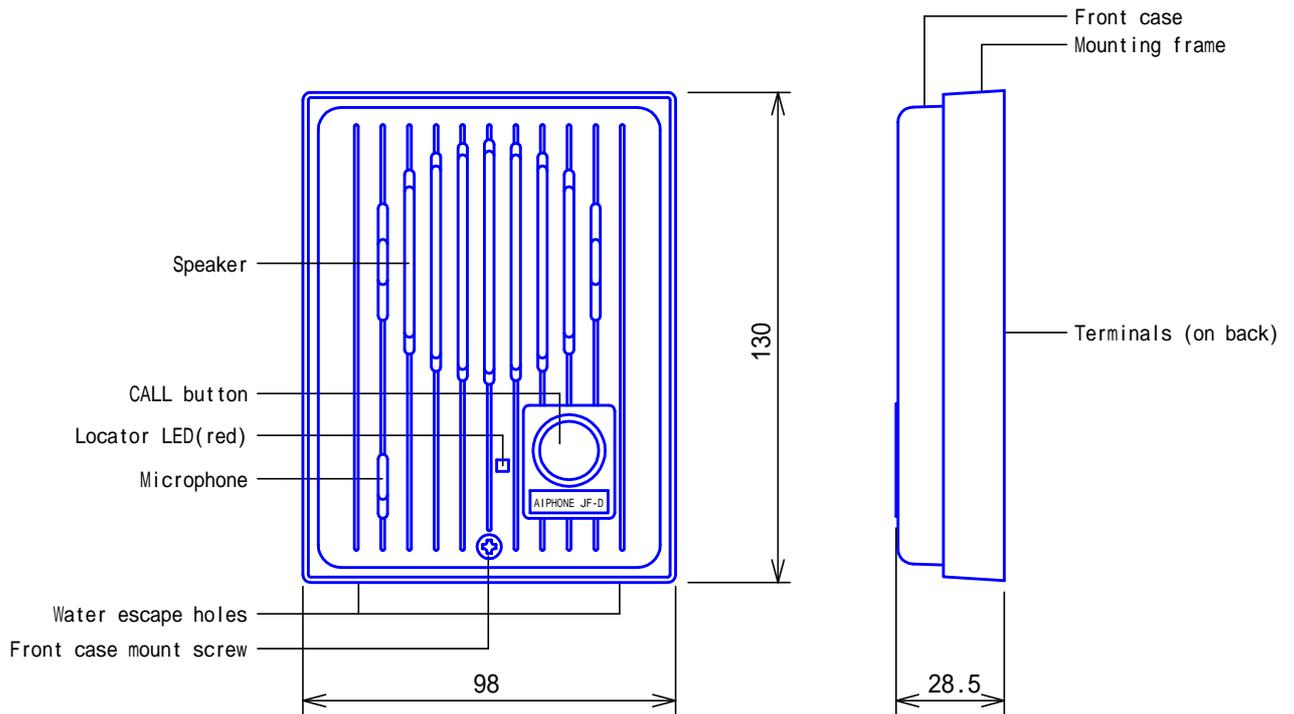


MOUNTING

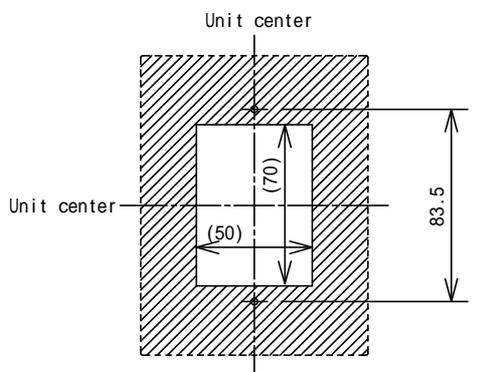

70(H) x 50(W): Opening cut out on the wall

WIRING DIAGRAM

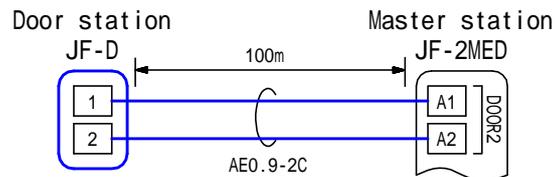

RESTRICTIONS

Do not cover the water escape holes on bottom with caulking seals, etc.
JF-D is compatible with JF-2MED Master station (Second door only in lieu of color video door station).

FUNCTIONS

Calling & communication with Master station.
Press CALL button to initiate a call.
Locator LED is steadily lit, when Master station is in powered status.

SPECIFICATIONS

Power source	DC4.5-6V (approx. DC9V in talking), supplied from Master station		
Locator LED current	1mA		
Type of communication	Open voice hands-free communication		
Mounting	Surface wall mount		
Electrical box	Single-gang box		
Housing	Fire-retardant PC + PS plastic		
Weight	200g (approx.)		
Unit color	Viscount (gray)		
Remarks	Weather-resistant (JIS C 0920 Protection Class 3 equivalent).		

DESCRIPTION	FIG. NAME	UNIT	DATE
DOOR STATION	PRODUCT/SPEC./WIRING/RESTR./FCN.	mm	2 October, 2006
MODEL NO.	FIG.NO.	PAGE	REVISION
JF-D	50812-1-1	1/1	1

AIPHONE