


JO-1FD

Video Expansion Station

The JO-1FD is a video expansion station that provides a second answering location in new or existing JO Series installations; one can be added per system. The JO-1FD must be installed between the door station and the JO-1MDW answering station, using two conductors to the door station and six conductors to the answering station.

During a call from the door station, video will be displayed on the 7" screen, accompanied by a short chime. Answering the call is done by a short push and release of the talk button for hands-free communication, or a push and hold for push-to-talk communication. Door release is also available by pushing the key button at any time.

The monitor button can be used to discretely view video from the door station. Volume levels for the call tone and from the door can be adjusted independently using a single button, based on the current status of the station.

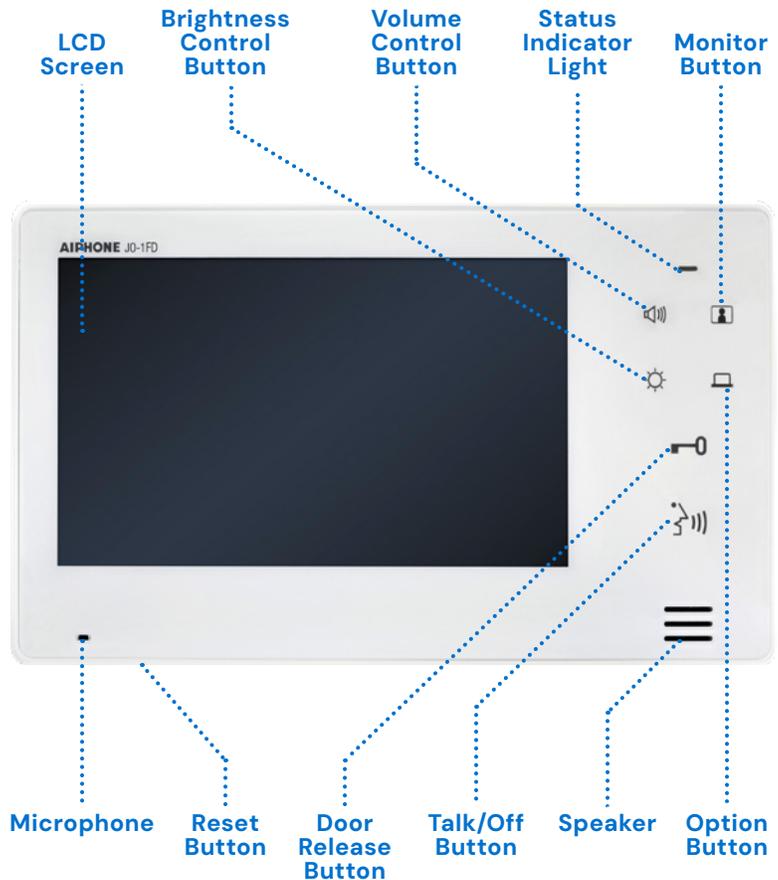

- **7" screen**
- **Slim design**
- **Hands-free or push-to-talk communication**
- **Electrostatic touch buttons**
- **Two-wire connection to door**

Power Source 18V DC (use PS-1820UL)

Power Draw 420mA max

Dry Contacts N/O 24V AC/DC, 500mA

Communication Hands-free (VOX) or push-to-talk (simplex)

Video Display 7" TFT LCD screen

Mounting Surface mount directly to wall or desk mount using MCW-S/B

Material Flame resistant ABS resin

Color White

Operating Temp 32°F~104°F (0~40°C)

Dimensions 5-1/8" H x 9-1/16" W x 13/16" D

Weight Approx. 1.06lbs (480g)