

JP-4MED


Video Sub Answering Station

The JP-4MED is a video answering station that can connect up to four video door stations and seven video sub answering stations in a JP Series system. It has a 7" LCD touchscreen and allows for handset (duplex) and hands-free (VOX) communication.

This station has a door release button for the user to allow visitor entry. The JP-4MED is also equipped with PTZ camera and brightness controls, giving the user different options to vary the camera angle and camera lighting for better visibility.

Picture memory records up to 20 calls to internal memory and up to 1,000 calls to a removable SD/SDHC card (not included). The JP-4MED connects to the door stations using 18AWG, 2-conductor cable and connects to video sub answering stations using Cat-5e/6 cable.

The JP-4MED is available in three box sets, which are defined below.

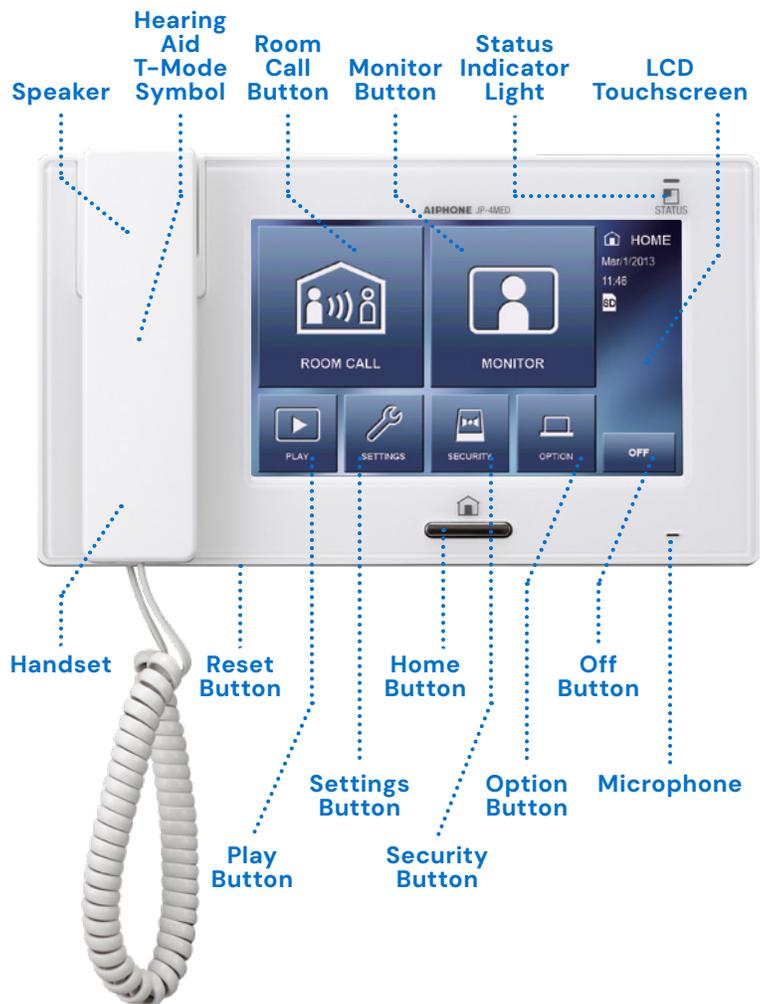

- **7" touchscreen LCD**
- **Hands-free (VOX) or handset communication**
- **Picture Memory**
- **Door release**
- **PTZ and brightness control**
- **Eight selectable call tones**
- **Station partitioning**
- **All call to inside stations**
- **Continuous room monitoring**
- **Video out**

Box sets include one JP-4MED answering station, one PS-2420UL power supply, and one video door station.

JPS-4AED: JP-DA plastic surface-mount station

JPS-4AEDV: JP-DV zinc die cast surface-mount station

JPS-4AEDF: JP-DVF stainless steel flush-mount station

Power Source	24V DC (use PS-2420UL)
Power Draw	340mA max
Door Release	Two N/O or N/C dry contacts, 24V AC/DC, 500mA (use RY-1824L or RY-3DL for larger contact rating)
Communication	Hands-free (VOX) or handset (full-duplex)
Video Display	7" LCD touchscreen
Resolution	800 x 480
Picture Memory	Built-in: record up to 20 calls (6 images per call) with up to 5 calls protected from overwriting SD/SDHC card: record up to 1,000 calls (40 images per call) with up to 100 calls protected from overwriting
Mounting	Surface mount directly to wall or 1-gang box or desk mount using MCW-S/B
Operating Temp	32°F~104°F (0~40°C)
Dimensions	5-11/16" H x 10-1/16" W x 1-7/8" D
Weight	Approx. 1.72 lbs (780g)