


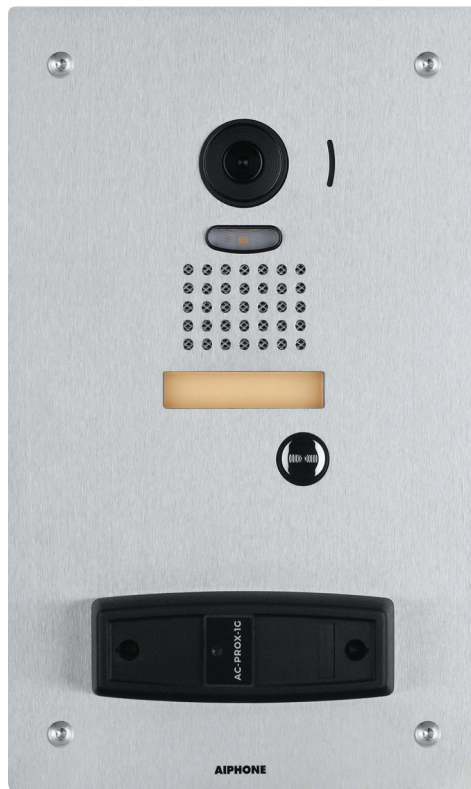

DESCRIPTION

The JP-DVF-PR is a vandal-resistant door station for the JP Series with a built-in AC-PROX-1G proximity card reader. The door station can either be surface or flush mounted. The intercom portion of the JP-DVF-PR connects to a JP-4MED master station with a 2-conductor, 18-AWG wire, and the reader connects to an access control system with a standard Wiegand connection.

The JP-DVF-PR features a PTZ camera and a backlit directory strip. The camera offers a 170-degree field of view, as well as an LED for low light illumination. The station calls to the master station when the button is pressed.

The AC-PROX-1G is a 125kHz Wiegand proximity reader. It features up to a 6" non-contact read range. It is compatible with Aiphone 40-bit credentials, as well as certain HID®, AWID®, and Pyramid credentials. The reader requires a connection to a compatible access control system.


FEATURES

- PTZ camera
- White LED for low light illumination
- Flush mount with included back box
- Stainless steel panel
- Illuminated directory
- Built-in proximity card reader

JP-DVF-PR

Flush Mount Video Door Station with Proximity Card Reader

FEATURE CALL-OUT

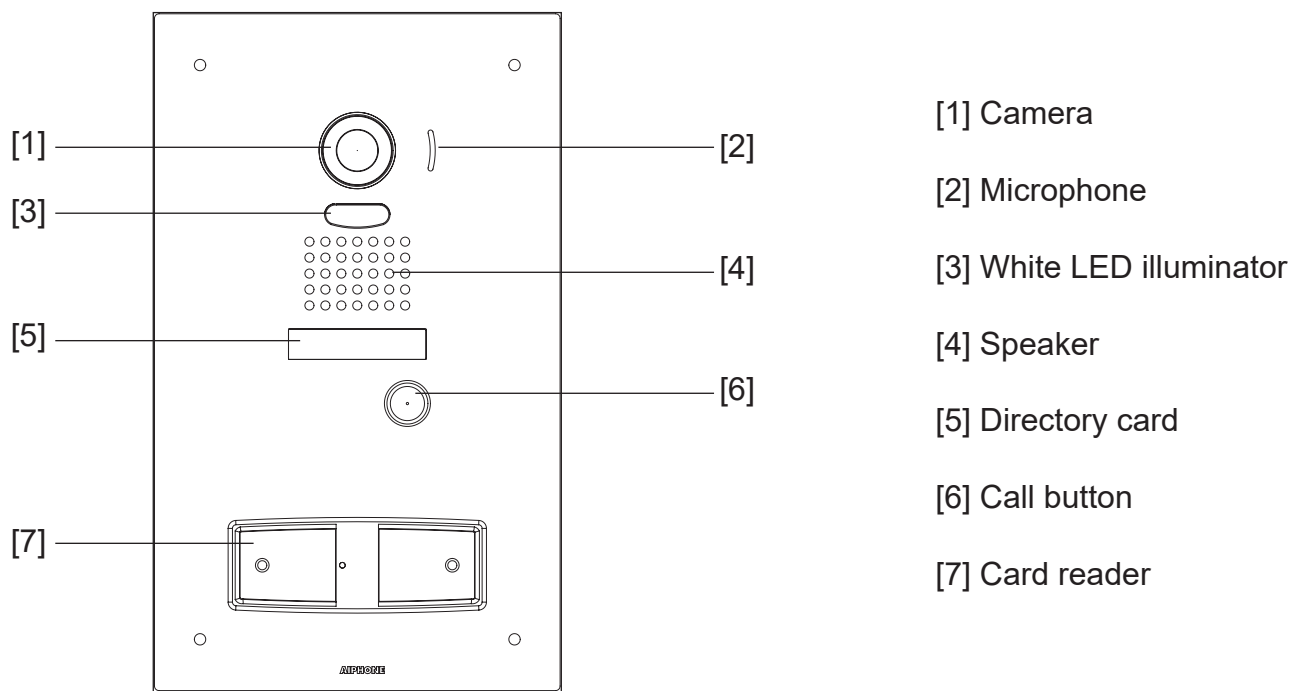

DOOR STATION SPECIFICATIONS

Power Source: 24V DC (supplied from JP-4MED master station)

Communication: Open voice hands-free

Camera: 1/4" color CMOS

Min. Illumination: 5 lux

Wiring: 18-gauge 2-conductor

Wiring Distance: 330'

Operation Temp: -4°~140°F (-20°~60°C)

Dimensions: 11-11/16" H x 7" W x 2-1/16" D

CARD READER SPECIFICATIONS

Power Input: 5~14V DC

Power Draw: 45mA

Frequency: 125kHz

Certifications: CSA, FCC, CE, C-Tick