

# JP-DVF-PR


## Video Door Station

The JP-DVF-PR is a stainless steel flush-mount video door station with a built-in 125kHz Wiegand proximity reader (AC-PROX-1G). It also includes a camera, microphone, speaker, call button, backlit nameplate, and tamper-resistant screws for mounting.

The intercom connects to the JP-4MED answering station up to 330' away using 18AWG 2-conductor solid core cable. This can be extended to 980' with the optional JPW-BA long distance adaptor and 851602 cable. The proximity reader requires a connection to a compatible access control system.

When the call button on the door station is pushed, the answering stations will ring and the video from the door station will be displayed. Two-way communication is established when the call is answered.

The proximity reader has a 6" non-contact read range and is compatible with Aiphone 40-bit, HID®, AWID®, and Pyramid credentials.

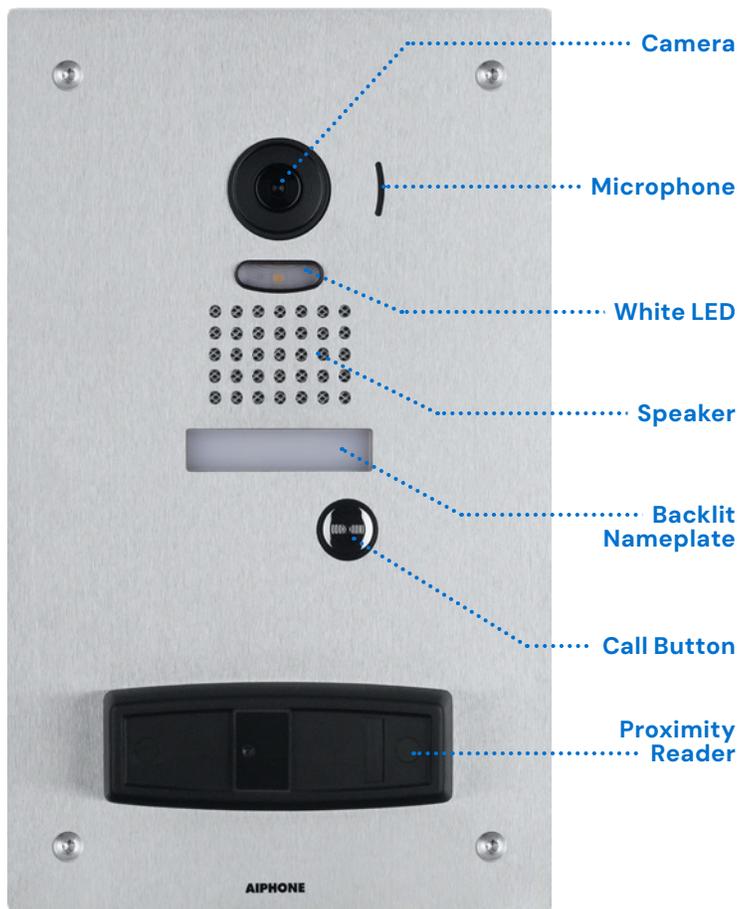

- **Built-in 125kHz proximity reader with 6" non-contact read range**
- **PTZ camera**
- **Two-way hands-free communication**
- **White LED automatically turns on in low-light conditions**
- **2-conductor wiring**
- **Backlit nameplate**

DOOR STATION	PROXIMITY READER
<b>Power Source</b> Supplied by the answering station	<b>Power Input</b> 5~14V DC
<b>Communication</b> Hands-free	<b>Power Draw</b> 45mA
<b>Camera</b> Type: 1/4" CMOS View Area: 100° vertical x 170° horizontal	<b>Frequency</b> 125kHz
<b>Min Illumination</b> 5 lux	<b>Certifications</b> CSA, FCC, CE, C-Tick
<b>Operating Temp</b> 14°~ 140°F (-10°~ 60°C)	<b>Credentials</b> Aiphone 40-bit, HID, AWID, Pyramid
<b>Material</b> Stainless steel	<b>Operating Temp</b> -31°~140°F (-35°~60°C)
<b>Mounting</b> Flush mount with included back box or surface mount with SBX-IDVFRA	
<b>Wire Type</b> 2-conductor, low cap, non-shielded, PE insulation, 18 AWG (use Aiphone #871802)	
<b>Distance</b> 330' (18 AWG)	
<b>Dimensions</b> 11-11/16" H x 7" W x 2-1/16" D	