


# JV-1MD

## Video Answering Station

The JV-1MD is a video answering station that is available in the JVS-1V and JVS-1F box sets. Wiring requires two conductors between the JV-1MD and the video door station (Aiphone 871802 PE insulated 18/2 cable is recommended).

The station features a 7" screen to view visitors and configure settings. The electrostatic touch buttons

to the right of the screen allow users to unlock the door and activate an exterior device. There are multiple call tone options available for the station. Communication with the door station can either be hands-free or push-to-talk. Still images from past calls can be viewed and deleted from the station; up to 30 images can be stored.

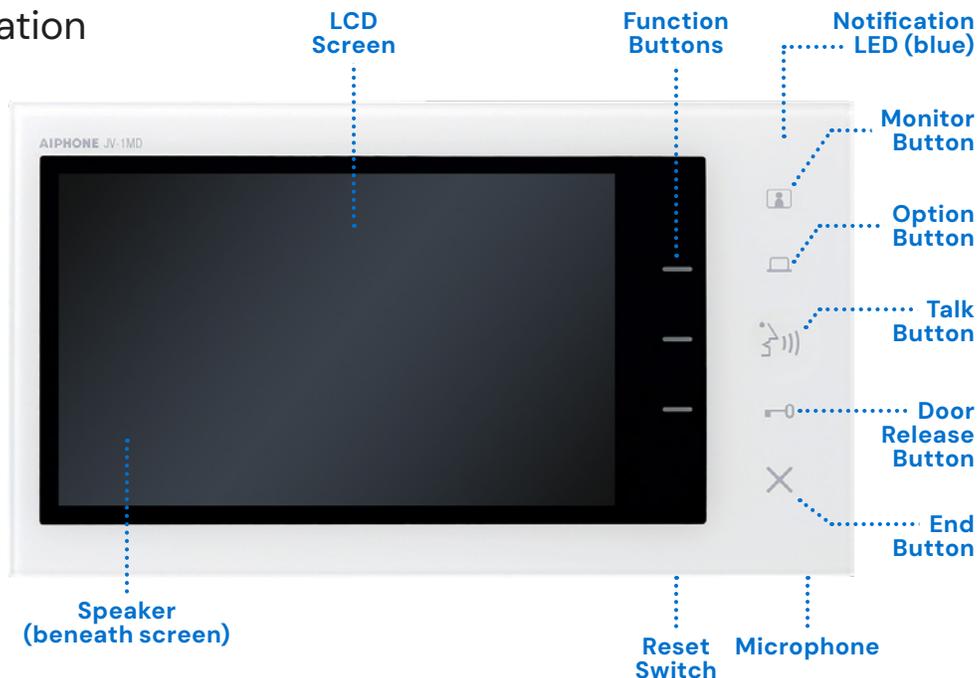

- **7" screen**
- **Slim design**
- **Hands-free or push-to-talk communication**
- **Electrostatic touch buttons**
- **Two-wire connection to door**
- **Simple daisy chain wiring**
- **One output to control a secondary device**
- **Expands system to 1x2**
- **Store up to 30 call images**

The JV-1MD is only available in the JVS-1V and JVS-1F box sets and is not sold separately. Box sets include one JV-1MD answering station, one PS-2420UL power supply, and one video door station.

JVS-1V: JV-DV aluminum die cast surface-mount station

JVS-1F: JV-DVF stainless steel flush-mount station

<b>Power Source</b>	24V DC (use PS-2420UL)
<b>Power Draw</b>	100mA standby, 780mA max
<b>Dry Contacts</b>	Door release N/O 24V AC/DC, 1A Option output N/O 24V AC/DC, 1A
<b>Communication</b>	Hands-free (VOX) or push-to-talk (simplex)
<b>Video Display</b>	7" LCD screen
<b>Mounting</b>	Surface mount directly to wall or desk mount using MCW-S/B
<b>Material</b>	Flame resistant PC + ABS resin
<b>Color</b>	White
<b>Operating Temp</b>	32°F ~ 104°F (0 ~ 40°C)
<b>Dimensions</b>	5-1/8" H x 9-1/16" W x 13/16" D
<b>Weight</b>	Approx. 1.17 lbs (530g)