



PRODUCT DRAWING

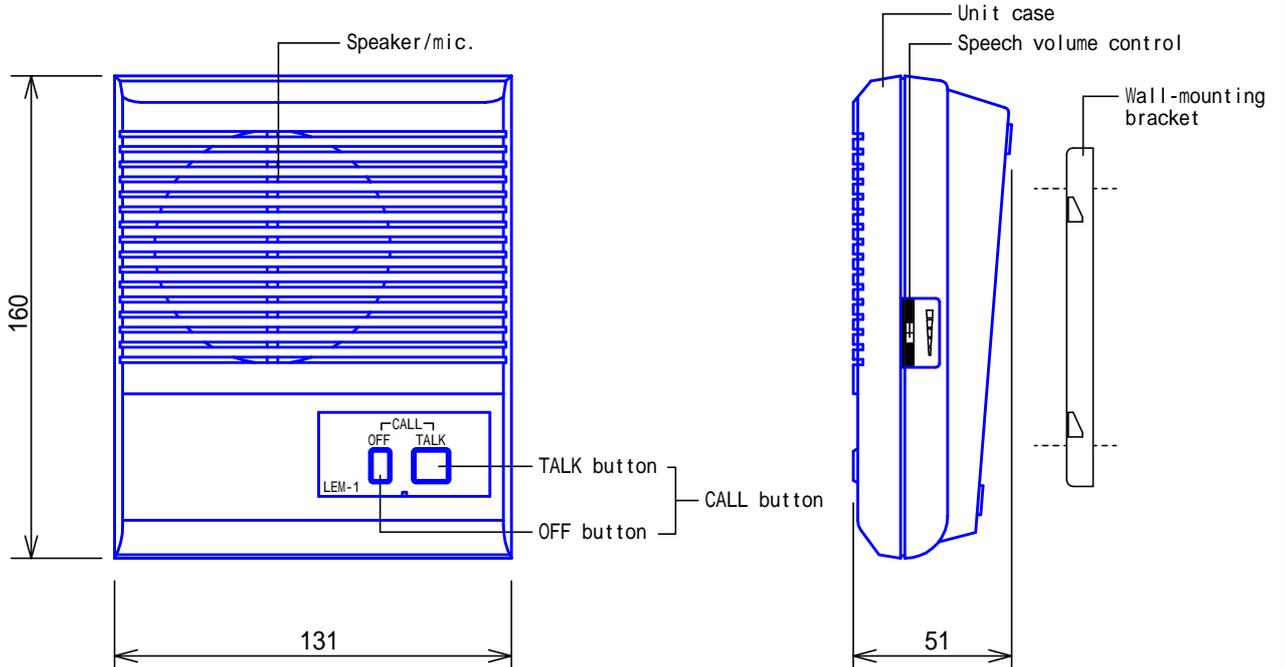


MOUNTING

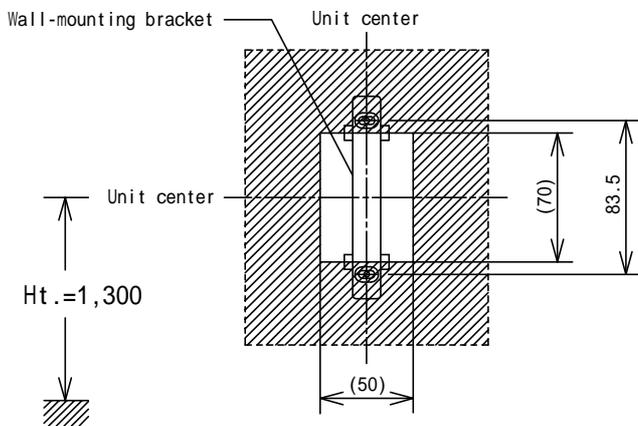

Cable inlet opening; As provided for single-gang mounting

DESCRIPTION MASTER STATION(1-call)	FIG. NAME PRODUCT DRAWING	UNIT mm	DATE 3 February, 2003
MODEL NO. LEM-1	FIG.NO. 57084311-1-2	PAGE 1/2	REVISION 2
			AIPHONE

WIRING DIAGRAM

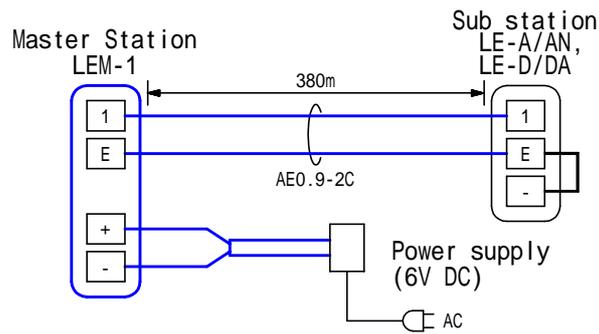

RESTRICTIONS

LEM-1 can not be power-sourced to Batteries nor AC mains.
 (Only 6V DC power supply is useable.)
 Shorting link between E & - shall not be removed.

FUNCTIONS

Calling & communication with a Sub station.
 To call; Depress both OFF & TALK buttons to ring with tone or depress "TALK" to transmit direct voice. To communicate; Depress "TALK" to transmit and release to receive.
 Depress OFF button to end communication, putting in standby so as be called audibly.

SETTING

Adjust communication volume control
 with Speech volume control (sliding, low to high).

SPECIFICATIONS

Power source	6V DC. Supplied from a Power supply PS-0602D.		
Current consumption	200mA(max.).		
Type of communication	Open voice press-to-talk communication.		
Output	350mW.		
Calling capacity	1 Sub station (any LE).		
Call tone	Mono tone & vocal calling. Mono tone only from Sub.		
Mounting	Desk-top use or surface wall mount.		
Electrical box	Single-gang box.		
Housing	Plastic.		
Unit color	White & gray, two-tone.		
Weight	300g(approx.).		
Remarks	Configures Master-selective system for 1 Sub station.		

DESCRIPTION	FIG. NAME	UNIT	DATE
MASTER STATION(1-call)	SPEC./WIRING/RESTR./FCN./SETTING	mm	3 February, 2003
MODEL NO.	FIG.NO.	PAGE	REVISION
LEM-1	57084311-2-2	2/2	1

AIPHONE