


MY Video Series used with Panasonic® Phone System **VIDEO DOOR ANSWERING WITH PHONE** MY-CU-PH

FEATURES/FUNCTIONS:

- * One or two Video Door Stations (MY-series) can be tied into MY-CU-PH monitor, with audio communication through the Panasonic telephone system.
- * Video Door Station rings Panasonic phones and turns on Alphone monitor. The call can be answered from any telephone extension in the system.
- * Alphone's unique PanTilt Video Door Station allows the camera to be moved 122° horizontally and 76° vertically to view a wide entry area.
- * Standard Alphone monitors (MYH-CU) can be added for additional video monitoring inside. The cameras can be activated from the monitor, or by calling the door station from the Panasonic phone (which also provides audio monitoring).
- * Video from door stations can be incorporated into cable distribution system to TV sets with the use of the MYW-MD Demodulator.

SYSTEM LAYOUT:

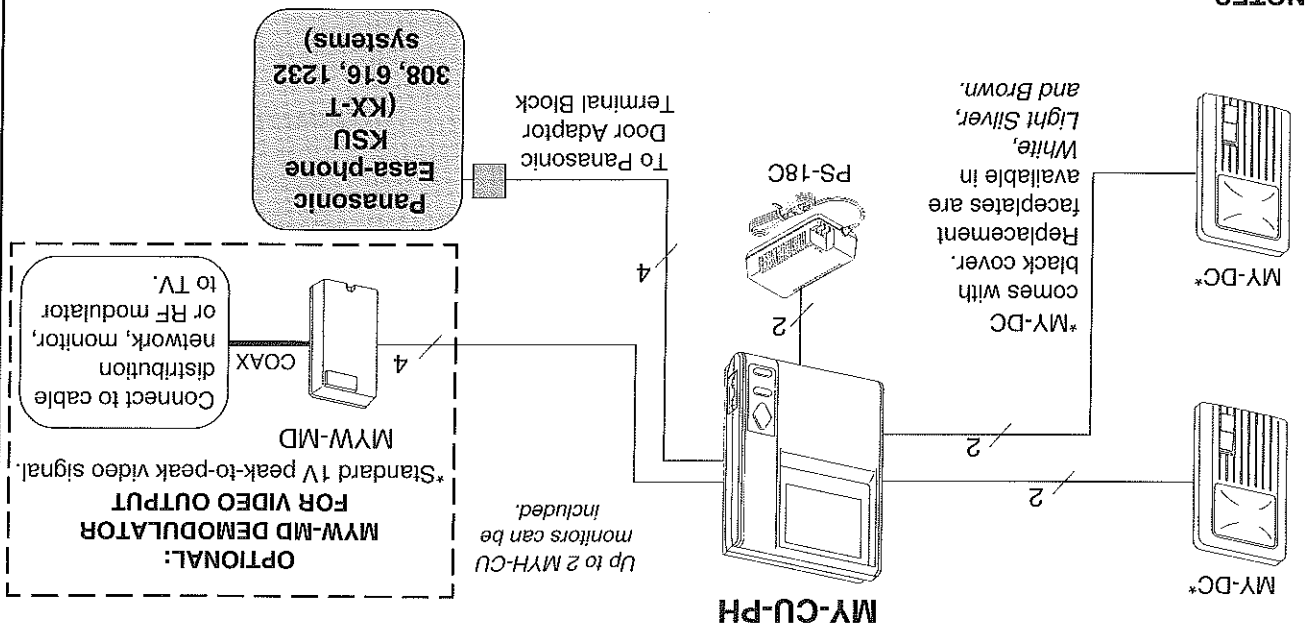

NOTES:

1. Video Door Stations require 2 conductor, 18AWG (#841802) wire to the MY-CU-PH monitor (up to 330'). For greater distance (up to 1000'), use the MYW-BA Long Distance Video Adaptor and #851602 wire (16AWG solid copper, max. 9.952 closed loop resistance, polyethylene insulation).
2. Various styles of video door stations are available: MY-CA surface mount, black. MY-DG with metal cover. MY-DS surface mount, brown, with fixed wide angle camera for up to 650' with 18AWG wire. For additional MYH-CU monitors inside, include one (1) PS-18C power supply for every three (3) units (including MY-CU-PH). Maximum distance from the first to last monitor looped is 245' with 6 conductor 18AWG (#841806) wire.

For more information on this and other Special Order Products, please call the Technical Support department.

Alphone Corporation
1700 130th Ave. N.E.
Bellevue, WA 98005
(206) 455-0510
FAX: (206) 455-0071

Communication systems for business, home and industry.

TOLL FREE TECHNICAL DEPARTMENT
FAX LINE: (800) 832-3765

-16-