




NDR and LEF-NE System Layout Communication and Access Control Intercom

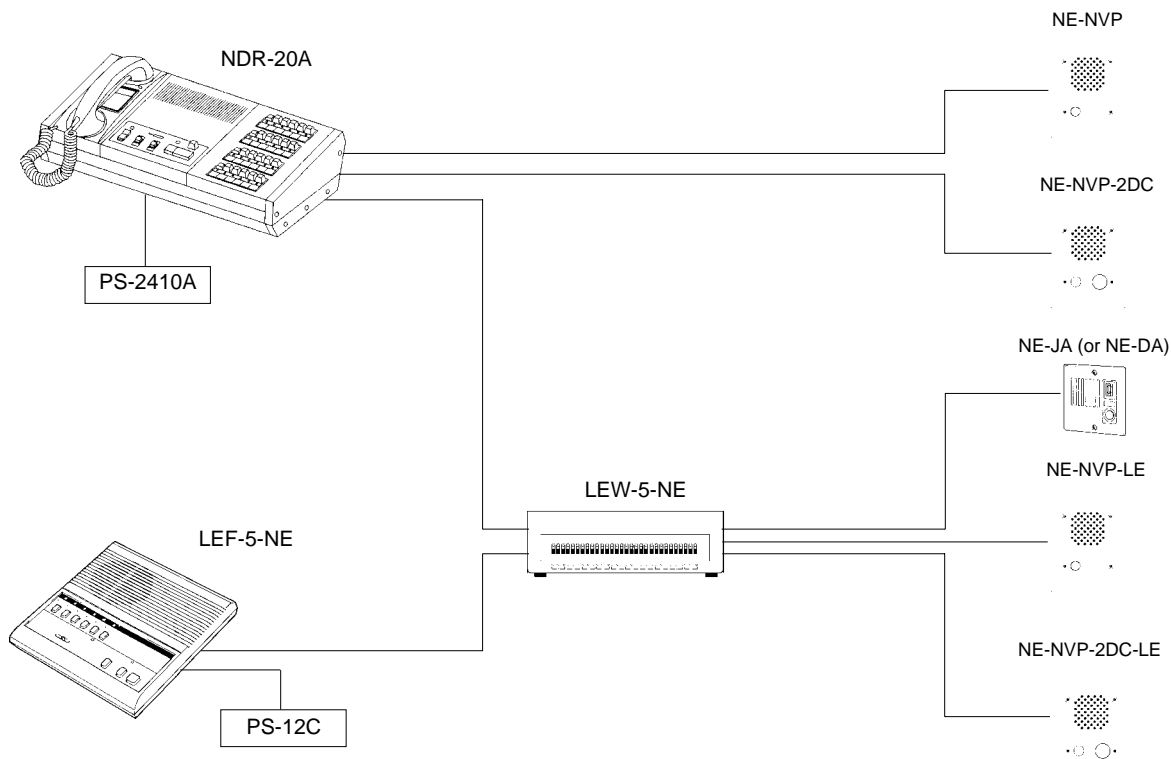

IMPORTANT INFORMATION:

- Maximum three LEF-NE masters per system.
- LEF-NE masters can communicate with each other. (Requires an open station button per master.)
- A sub connected to the LEW-5-NE can call and communicate with either the LEF-NE or NDR master.
- There is no communication between subs.
- There is no communication between standard NDR & LEF-NE masters. If this feature is required, contact Aiphone.
- One LEW-5-NE is required for every 5 "LE" sub stations.
- Standard subs can communicate only with the master they are directly connected to.

Compatible Master Stations:

NDR series masters:

NDR-10: 10-call Master w/selective outputs
NDR-10A: 10-call Mstr. w/hndst. & sel. outputs
NDR-20: 20-call Master w/selective outputs
NDR-20A: 20-call Mstr. w/hndst. & sel. outputs
NDR-30: 30-call Master w/selective outputs
NDR-30A: 30-call Mstr. w/hndst. & sel. outputs
NDR-40: 40-call Master w/selective outputs
NDR-40A: 40-call Mstr. w/hndst. & sel. outputs

LEF-NE masters:

LEF-5-NE: 5 Call master (Requires 1 LEW-5-NE)
LEF-10-NE: 10 Call master (Requires 1 LEW-5-NE per 5 subs)

Compatible Sub Stations:

Communication to LEF-NE & NDR masters

NE-NVP-LE: Vandal resistant sub station
NE-NVP-2DC-LE: Vandal resistant sub station with emergency call button

NE-DA: Surface mount door station
NE-JA: Flush, stainless steel door station

Communication to NDR master only:

NE-NVP/B: Vandal resistant sub station
NE-DA: Surface mount door station
NE-JA: Flush mount stainless steel door station

Communication to LEF master only:

LE-D: Door station, surface mt.
LE-DA: Door station, flush stainless steel
LE-DL: Door station, surface mt. metal
LS-NVP/B: Vandal proof station