




HM-7 **All Master
Home System**

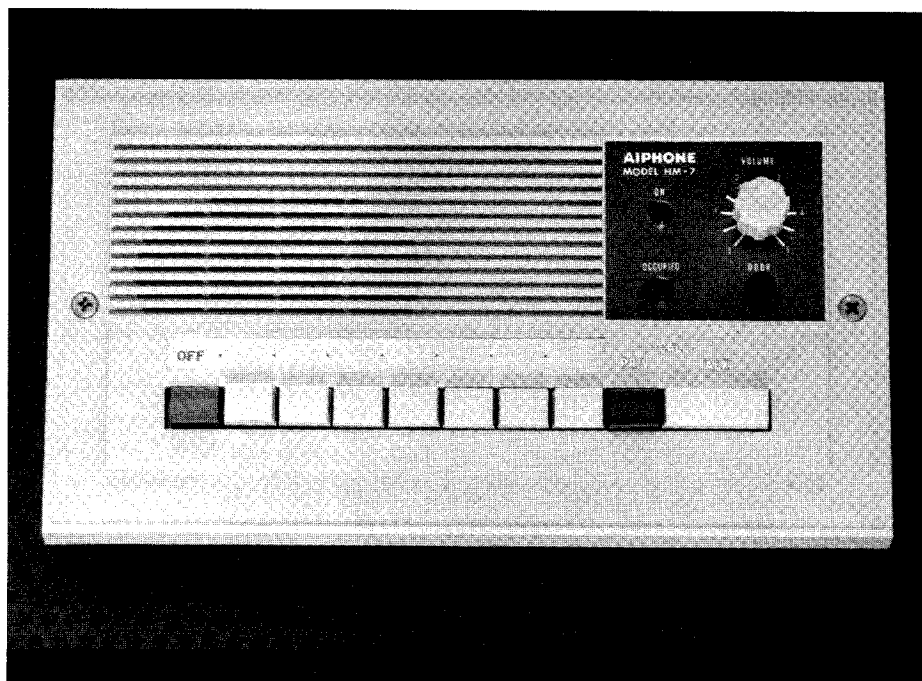


HM-7 Master Station (Stock Product)




DD-1



CH-BA



BA-1



HM-10A

Basic System

HM-7 All Master Home Intercom System

Description

Door Chime and Background Music through all stations, and Paging Capability.

Models

DD-1 Chime tone and Background Music Adaptor.

BA-1 Paging adaptor.

HM-5A 5-call desk style master.

HM10A 10-call desk style master.

BG-2A BGM only Adaptor.

CH-BA Flush type door station.

Features/Functions

Chime tone from substation to master units using DD-1 and PG-3 amplifier.

BGM through master stations.

Door release button on master.

Station-to-station call by voice or electronic tone.

Hands-free operation from station receiving a call.

Privacy button at every station to lock out monitoring.

5- and 10-call desk/wall mount master.

Flush type door station. (CH-BA)

BGM Adaptor. (BG-2A)

System Components

(Stock Products)

HM-7 7-call master station

PS-12C Power supply

CH-B Door station

EL-9S Electric door release

PG-3 3 watt amplifier

Paging amplifiers and speakers

Dimensions (in inches)

	H	W	D
DD-1	2 $\frac{1}{32}$	3 $\frac{7}{16}$	5 $\frac{5}{8}$
BA-1, BG-2A	2 $\frac{1}{32}$	3 $\frac{7}{16}$	5 $\frac{5}{8}$
HM-5A, HM-10A	3 $\frac{3}{8}$	9 $\frac{5}{16}$	8 $\frac{7}{8}$
CH-BA	4 $\frac{1}{2}$	4 $\frac{1}{2}$	1 $\frac{1}{8}$

Wiring Requirements

3 common, 1 individual between masters, plus 2 common for door release

Between DD-1 and HM-7:
8 conductors


Between DD-1 and PG-3:
5 conductors

Between PG-3 and HM-7:
3 conductors

HM-7 W/CHIME DOOR CALL TONE
AND/OR BGM

Maximum Communication Distance

400'/24 AWG, 650'/22 AWG,
1,000'/20 AWG

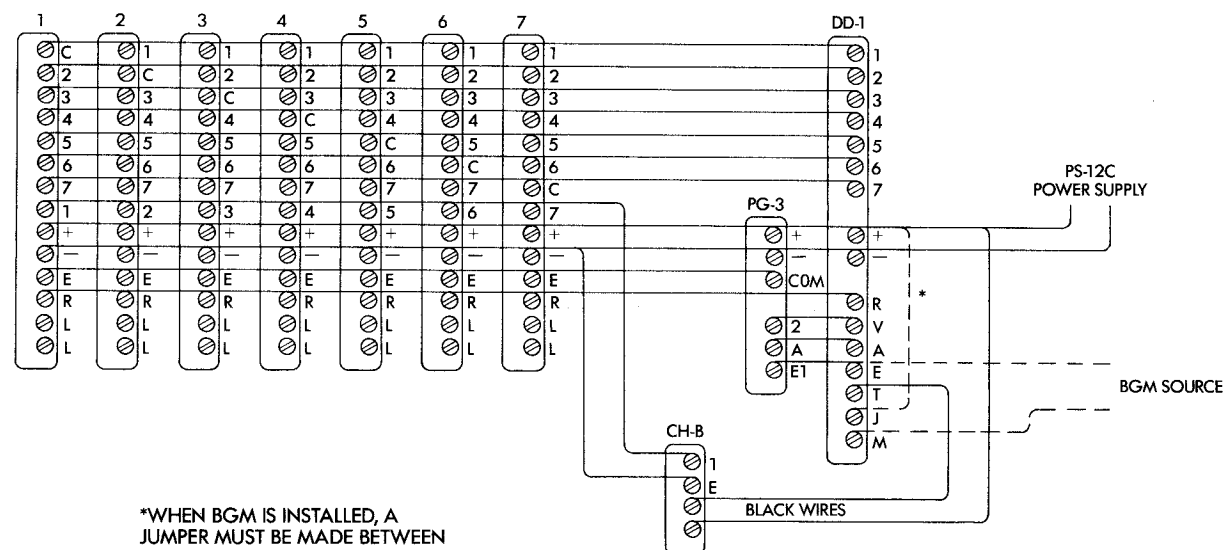

Aiphone Corporation

1700 - 130th Ave NE
P.O. Box 90075
Bellevue, WA 98009
(206) 455-0510
Telex 320-0288
FAX (206) 455-0071

Contact technical sales if additional configurations are required.

AIPHONE[®]
Intercom Systems for Home, Business & Industry.