
DATA SHEET

IXG-2C7-L IP Video Tenant Station

The IXG-2C7-L is an IP video tenant station with a 7" LCD touchscreen that is compatible with T-coil hearing aids. It can receive calls from other stations in the system and communication is hands-free (VOX).

Touching the key button will unlock a door or entrance station during communication. Tenants can summon the elevator to their floor with the elevator call button.

A history of received calls are maintained in its built-in memory, which can be expanded by adding a microSD™ card. Up to eight IXG-2C7-Ls can be installed in a single unit. Each can selectively communicate with other IXG-2C7-Ls in the same unit or call the unit's mobile apps.

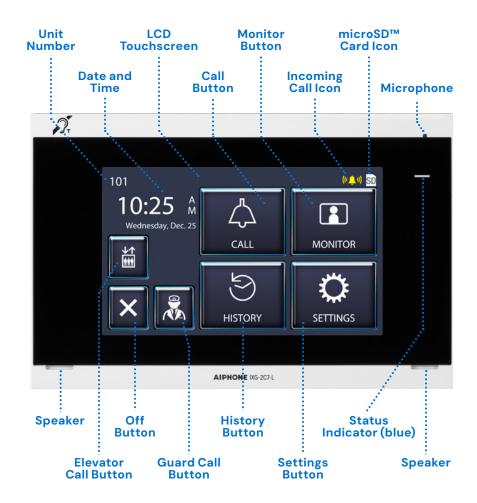

- T-coil hearing aid compatibility
- PoE compliant
- 7" LCD color touchscreen
- Hands-free audio communication
- Memory can be expanded with microSD ™ card
- Place calls to other stations within tenant
- Call concierge / guard
- Call elevator to floor
- Monitor door stations

Power Source PoE

Power Draw 1.9W standby, 5.9W max

Screen 7" LCD TFT touchscreen

Monitor Resolution 800 x 400

Communication Full-duplex

Audio Codec G.711(µ-law, A-law)

Video Codec H.264, motion JPEG

Protocols IPv4/v6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP/RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS, TLS

Encryption TLS 1.2

Operating Temp 32°~104°F (0°~40°C)

Dimensions 5-13/16" H x 8-15/16" W x 1" D