



DESCRIPTION

The IXG-DM7-HID is an IP video entrance station for the IXG Series. It is equipped with a 7" LCD directory screen that is used for calling a tenant or entering an access entry code. Up to 9,999 names/numbers can be stored in the station.

A motion sensor will activate the screen when the visitor approaches. Once a call is placed, the visitor will be displayed on the tenant station or app using the 720p HD camera. A T-coil hearing aid will be able to pick up audio signals from the station.

The station includes a built-in HID® card reader for card access. It supports Prox or iCLASS® 26 bit and 37 bit cards, Aiphone 40 bit cards, and Corporate 1000® 35 bit and 48 bit cards. The station can also act as an independent access control panel for the built-in HID reader.


FEATURES

- 7" touchscreen
- 802.3af PoE
- On-board recording with microSD™ card
- Simple user interface
- T-coil hearing aid compatible
- Hands-free audio communication
- 1.23 megapixel fixed video camera
- Up to 9,999 names/numbers can be stored
- Programmable contact inputs and outputs
- Motion sensor to activate LCD
- Built-in HID reader for card access
- Stainless steel panel
- Rugged IP65 and IK08 ratings

IXG-DM7-HID

IP Video Entrance Station

FEATURE CALL-OUT

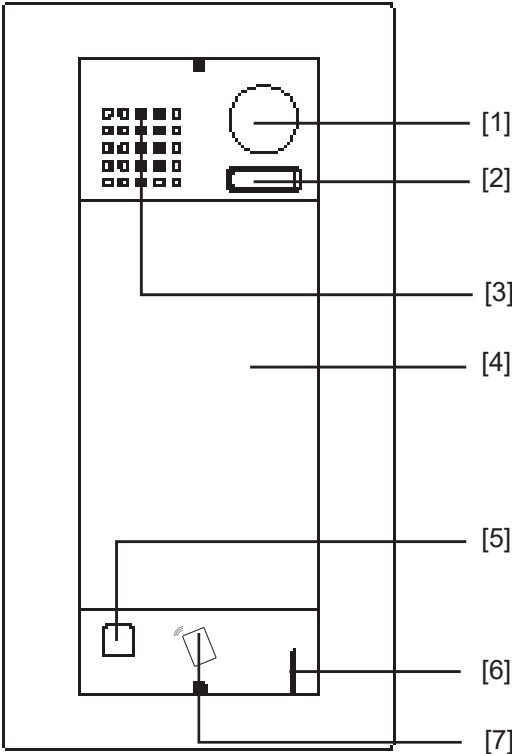

FEATURE CALL-OUT LEGEND	SPECIFICATIONS
[1] Camera	Power Source: PoE (IEEE 802.3af class 0)
[2] White LED	Power Draw: 5.3W standby, 11.6W max
[3] Speaker	Screen: 7" TFT display
[4] LCD Touch Screen	Monitor Resolution: 800 x 400
[5] Sensor	Communication: Full-duplex
[6] Microphone	Audio Codec: G.711 (μ-law, A law)
[7] HID® card reader	Video Codec: H.264
	Protocols: IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS, TLS
	Port Security: IEEE 802.1X
	Operation Temp: -22°~140°F (-30°~60°C)
	Dimensions: 13-11/16" H x 7-3/16" W x 2" D
	HID Reader Card Types: High Frequency (13.56MHz) HID iClass, SEOS, HID iClass SR, HID iClass SE Low Frequency (125kHz) HID Proximity, Indala Proximity
	Card Format: H10301 (26-bit Wiegand) H10302/H10304 (37-bit Wiegand) Aiphone 40-bit 35bit/48bit Corporate 1000