



PRODUCT DRAWING

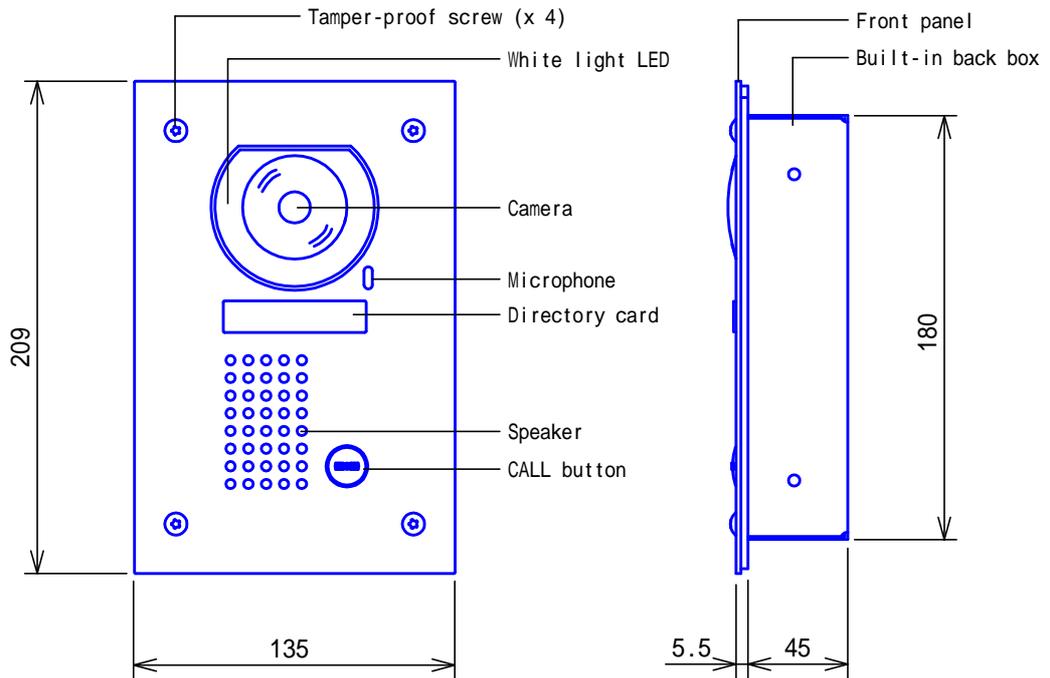

MOUNTING

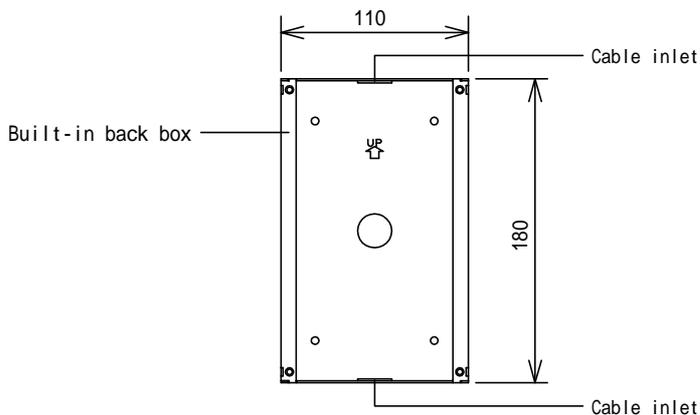

Built-in back box dimensions; 180H x 110W x 45D.
Secure opening with a space of 2mm
between each side of box and wall.

SPECIFICATIONS

Power source	Supplied from Master station		
Type of communication	Open voice hands-free communication		
Camera	1/4 inch color CCD		
Pixels	250,000 Pixels		
Minimum illumination	5 Lux		
Ambient temperature	-10 ~ +60		
Mounting	Flush mount		
Electrical box	Not used (Mounts on built-in back box.)		
Housing	Front panel: Stainless steel. Main unit: Resins.		
Weight	550g (approx.), back box 430g (approx.)		
Unit color	Stainless steel, vertical hair-line processed.		
Remarks	Weather-resistant (JIS C 0920 Protection Class 3 equivalent)		

DESCRIPTION VIDEO DOOR STATION	(Color Vandal-resistant)	FIG. NAME PRODUCT/SPECIFICATIONS	UNIT mm	DATE 22 June, 2006
MODEL NO. JF-DVF		FIG.NO. 50801-1-2	PAGE 1/2	REVISION 1

AIPHONE

WIRING DIAGRAM

Video door station



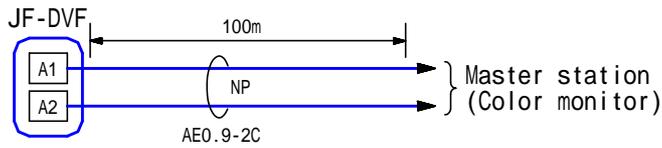


IMAGE VIEW AREA & MOUNTING HEIGHT

Vertical

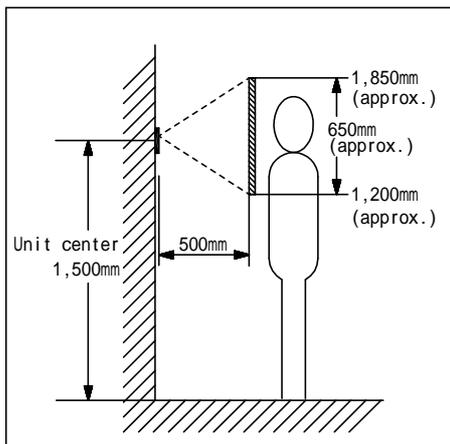


Horizontal




RESTRICTIONS

JF-DVF door station is exclusively used with JF & JB Series Master stations.


Avoid to install JF-DVF in the following locations;



At the Entrance where background is sky in upper floors of Condominiums, etc.



The background of the standing caller's is white wall.



Where the standing location is strongly sunlit.

FUNCTIONS

Initiating a call to and entering communication with Master station

White light LED turns on in low-light conditions

Directory card is backlit constantly

DESCRIPTION VIDEO DOOR STATION	(Color Vandal-resistant)	FIG. NAME WIRING/IMAGE/RESTR./FCN.	UNIT mm	DATE 2 October, 2006
MODEL NO. JF-DVF		FIG.NO. 50801-2-2	PAGE 2/2	REVISION 1

AIPHONE